

# DWV PIPE HANGER

» 553 SERIES

HangsTuff™

## SPECIFICATION

Sioux Chief's 553 series HangsTuff™ DWV pipe hanger shall be used where necessary to secure Schedule 40 DWV pipe in accordance with national or local code requirements. Hanger shall be 100% corrosion proof and UV resistant. Hanger shall be impact resistant to 0°F, and be able to withstand temperatures up to 140°F. Hanger shall include two preloaded rust resistant, zinc plated, ring shank nails, for a more permanent installation. Hanger shall feature I-beam design for strength and rigidity with a locking finger device designed to hold the pipe in place when installed at all angles. Hanger shall be compatible with copper, PEX or CPVC, allow for thermal expansion and contraction and IAPMO certified.

## INSTALLATION

Remove nails and insert into nail holes to secure hanger to joist. Lay tube on top of cradle then push down to snap pipe securely with locking finger. Pipe may be inverted when necessary. Stem may be shortened if necessary.

## MATERIALS

**Hanger:** ABS, U.V. resistant, corrosion-proof, impact-resistant

**Nail:** 1<sup>5</sup>/<sub>8</sub>" rust-resistant, zinc-plated, continuous ringshank

## SAFE WORKING LOADS

	1½"	2"	3"	4"
Cradle:	40 lbs.	50 lbs.	45 lbs.	40 lbs.
Inverted:	15 lbs.	15 lbs.	15 lbs.	15 lbs.


## DIMENSIONS

	1½"	2"	3"	4"
A: length to center of pipe	8 <sup>5</sup> / <sub>8</sub> "	8 <sup>15</sup> / <sub>16</sub> "	9 <sup>7</sup> / <sub>16</sub> "	9 <sup>15</sup> / <sub>16</sub> "
B: length of hanger	10"	10½"	11¾"	12¾"
C: length to gripping finger	7½"	7½"	7½"	7½"
D: distance between nailways	1"	1"	1"	1"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



553-8W

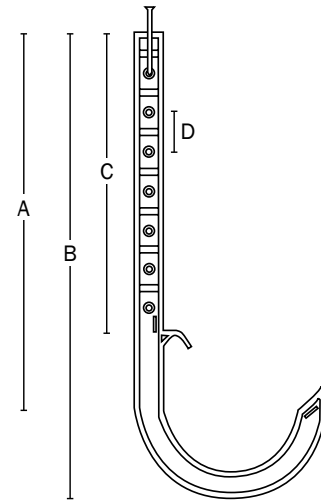

Except for 553-830W

Made in USA

Create Item Number

## 553-0AW

e.g. 553-8W: white 3" Sch. 40 HangsTuff

### LENGTH A

6 = 1½" Sch. 40

7 = 2" Sch. 40

8 = 3" Sch. 40

830 = 2" Sch. 30

9 = 4" Sch. 40