



A Series of Flexible Anodeless Risers for the Propane Gas Market

X-Riser®

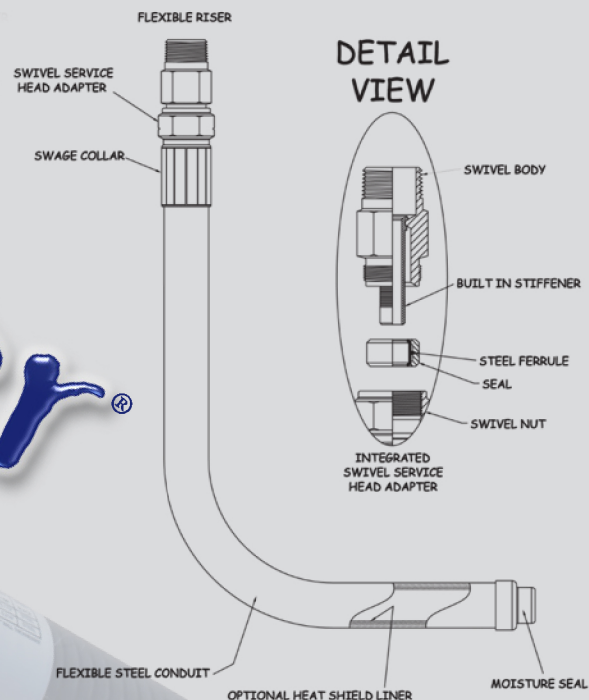

Features & Benefits

- **NO UNDERGROUND JOINTS** - One solid service line from point-to-point with above ground terminations.
- **NO CHAMFERING** - A simple clean cut is all that is required.
- **BI-DIRECTIONAL SEAL** assembly CAN'T be installed improperly where some competitors multiple internal components MUST have proper order and orientation to function properly.
- **NO TORQUE REQUIREMENTS** - All X-Risers incorporate the "bottoming" or "positive stop" design. Simply tighten the compression nut until it is metal-to-metal and you are done.
- **SIMPLE DESIGN** can be installed with one flat jaw wrench extending the life of protective coatings commonly flawed or removed by pipe wrenches.
- **INTEGRAL BARBED STIFFENERS** are permanent (not loose) for additional pull out resistance.
- **QUALITY** - Chicago Fittings products are CNC machined from solid bar stock (not castings) providing high quality product with the most precise threads and design flexibility.

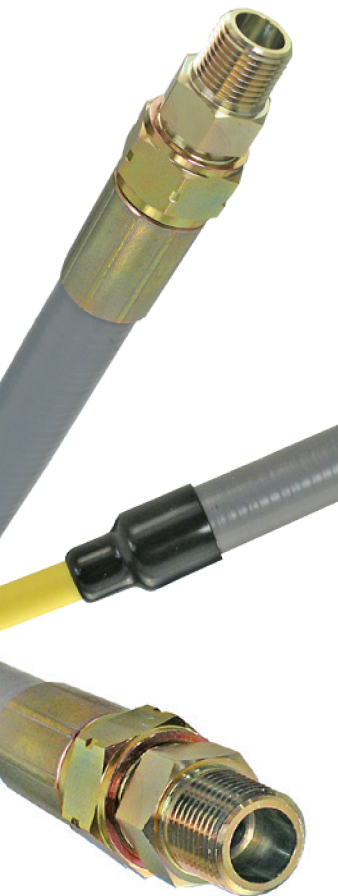

Flexible Anodeless Risers with Heat Shield/Liner for Propane Use

Part #	Outlet	Tube Size	Wall	SDR	Conduit Length (in.)
XR-10B-8-36-L-ZDC	1/2" MPT	1/2"CTS	.090"	7	36
XR-10B-8-72-L-ZDC	1/2" MPT	1/2"CTS	.090"	7	72
XR-10B-8-96-L-ZDC	1/2" MPT	1/2"CTS	.090"	7	96
XR-10B-8-144-L-ZDC	1/2" MPT	1/2"CTS	.090"	7	144
XR-10B-8SN-36-L-ZDC	1/2" FEMALE SWIVEL 45° FLARE	1/2"CTS	.090"	7	36
XR-10B-8SN-72-L-ZDC	1/2" FEMALE SWIVEL 45° FLARE	1/2"CTS	.090"	7	72
XR-10B-8SN-96-L-ZDC	1/2" FEMALE SWIVEL 45° FLARE	1/2"CTS	.090"	7	96
XR-10B-8SN-144-L-ZDC	1/2" FEMALE SWIVEL 45° FLARE	1/2"CTS	.090"	7	144
XR-10B-12-36-L-ZDC	3/4" MPT	1/2"CTS	.090"	7	36
XR-10B-12-72-L-ZDC	3/4" MPT	1/2"CTS	.090"	7	72
XR-10B-12-96-L-ZDC	3/4" MPT	1/2"CTS	.090"	7	96
XR-10B-12-144-L-ZDC	3/4" MPT	1/2"CTS	.090"	7	144
XR-17C-10SN-36-L-ZDC	5/8" FEMALE SWIVEL 45° FLARE	3/4" IPS	.095"	11	36
XR-17C-10SN-72-L-ZDC	5/8" FEMALE SWIVEL 45° FLARE	3/4" IPS	.095"	11	72
XR-17C-10SN-96-L-ZDC	5/8" FEMALE SWIVEL 45° FLARE	3/4" IPS	.095"	11	96
XR-17C-12-36-L-ZDC	3/4" MPT	3/4" IPS	.095"	11	36
XR-17C-12-72-L-ZDC	3/4" MPT	3/4" IPS	.095"	11	72
XR-17C-12-96-L-ZDC	3/4" MPT	3/4" IPS	.095"	11	96

A597 Series



Replacement X-Riser Service Head Top Half Assemblies with Integral Stiffener

Part #	Outlet	Tube Size	Wall	MPT
A597-10-8	1/2" MPT	1/2"CTS	.090"	7
A597-10-8-SW	1/2" Female Swivel 45° Flare	1/2"CTS	.090"	7
A597-10-12	3/4" MPT	1/2"CTS	.090"	7
A597-17-10-SW	5/8" Female Swivel 45° Flare	3/4" IPS	.095"	11
A597-17-12	3/4" MPT	3/4" IPS	.095"	11

Note: The above part numbers are directly interchangeable with any X-Riser of the same corresponding tube size.