

STUB OUT KIT - F1960

689 series

Rough-Up™ Stubout Kit

SPECIFICATION

Sioux Chief 689 series stub out assembly products shall be used where necessary in hot and cold water supply systems. Stub out assembly products shall allow for connection to the hot water and cold water lines through pre-formed copper terminations with appropriate ASTM pipe connections. Fitting ends shall be NSF listed. Sioux Chief stub out kits shall come with the proper bracketing to support the wall penetration terminations. Bracketing shall be Sioux Chief Strong Arm™ series supports.

MATERIALS

Copper: Type L

Bracket: Galvanized steel

Bracket Support: ABS


Screws: #8x1" wood screw

Inlet/Outlet Connection: Brass or preformed copper

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____



689WG3212

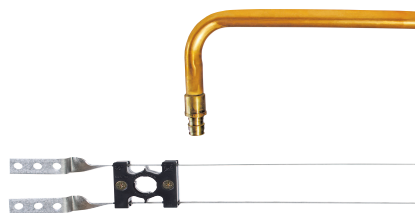

689WG2211

Create Item Number

689WG A B

e.g. 689WG2201 = 4" x 8" F1960 PEX end stubout & Strong Arm support bracket for single 1/2" CTS stub out

Additional options available at www.siouxchief.com

A STUB Out

- ☐ 22 (1): 1/2" 4x8
- ☐ 32 (2): 1/2" 4x8
- ☐ 51 (2): 3/4" 4x8

B Bracket Option

- ☐ 01 16" StrongArm™, 1/2" w/ (1) LockBlock™
- ☐ 11 24" StrongArm™, 1/2" w/ (1) LockBlock™
- ☐ 02 16" StrongArm™, 1/2" w/ (2) LockBlock™
- ☐ 12 24" StrongArm™, 1/2" w/ (2) LockBlock™
- ☐ 03 16" StrongArm™, 3/4" w/ (2) LockBlock™
- ☐ 13 24" StrongArm™, 3/4" w/ (2) LockBlock™
- ☐ 91 16" StrongArm™, 1/2" w/ (1) Shower WallNut LockBlock™