

citti 6032 Without Insert

60" x 32" x 20"



Product No.

Model Left	TMU BCIDRA0LT-XX	Soaker BCIDRA0LN-XX
Model Right	TMU BCIDRA0RT-XX	Soaker BCIDRA0RN-XX
Model Front Overflow, Left	TMU BC3DRA0LT-XX	Soaker BC3DRA0LN-XX
Model Front Overflow, Right	TMU BC3DRA0RT-XX	Soaker BC3DRA0RN-XX

ThermoMasseur (TMU)

Air Jet System	\$4,905
Jets	44
1 heated backrest	Included
Mia® Control	Included
BU-Touch Control Application <i>BUTOUCH</i>	\$520
Geysair®	Included
AromaCloud® <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045

Soaker

AromaCloud® <i>BAROMAC</i>	\$620
Illuzio Chromatherapy <i>BCHRO6</i>	\$1,045
WarmTouchShell® <i>BWTS</i>	\$1,180
DOT Control	Included with therapy

Features

Installation Type	Alcove (3 walls)
Integrated Skirt & Tile Flange (specify right or left)	Installed & Included
No. of bathers	4 Imp. gallons 44 US gallons 53
Integrated Drain & Overflow — ZenFlow [†] <i>BOVERINIZF-XX</i>	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Installed & Included
Standard Bath Color	
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Included

Options UPCHARGE APPLICABLE

Finish			
<input type="radio"/> UltraVelour Matte Finish (white only) <i>BVEL1</i>			\$685
Control (TMU only)			
MiaPlus®# <i>BMIAP2-XX</i>			\$300
Universal Armrests <i>BGBGU-XX</i>			
<input type="radio"/> White 01			\$940
Bath Pillow <i>BPILLOW</i>			\$250
Drain & Overflow	Integrated ZenFlow [†] <i>BOVERINIZF-XX</i>	Integrated with trim <i>BOVERIN-XX</i>	16" x 35" ^{***} <i>BOVER16-XX</i>
<input type="radio"/> Chrome 07	\$40	\$75	\$100
<input type="radio"/> White 01 <input type="radio"/> Biscuit 02	Incl.	\$40	\$130
<input type="radio"/> Brushed Nickel 09	\$40	\$75	\$245
<input type="radio"/> Polished Nickel 10	\$40	\$75	\$245
<input type="radio"/> Oil-rubbed Bronze 11	N/A	N/A	\$245
<input type="radio"/> Matte Black 19 <input type="radio"/> Satin Brass 18	\$100	\$130	N/A
<input type="radio"/> Matte White 32	\$40	\$75	N/A
If Required by Construction Code			
Brass drain & overflow kit <i>BDRCOB</i>			\$250
Brass drain kit <i>BDRCB</i>			\$65
16" x 35" Cable driven brass drain & overflow kit# <i>BOVERBR</i>			\$250

† Turbine must be remotely installed in certain conditions. With the Control installed on the deck, a complete shower door cannot be installed.

Faucets must be wall-mounted. Don't forget to specify the finish of the Integrated drain & overflow.

Only The MiaPlus® Control is included when purchasing Chromatherapy on a TMU.
 *** Only for models with front overflow.


citti 6032 Without Insert

60" x 32" x 20"



Technical Specifications

Standard overflow position shown. Front position available.

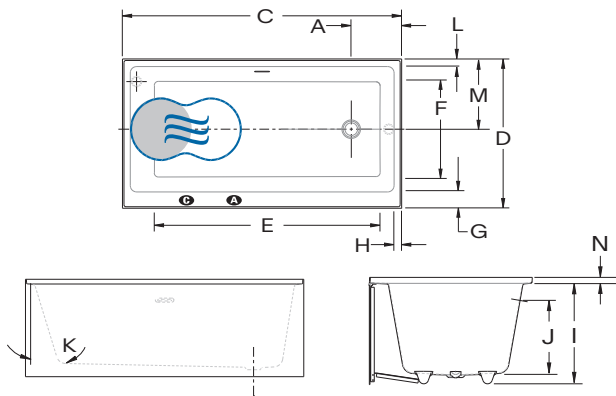

Letter	Description	Measure
A	Outside edge to center drain (Integrated drain & overflow)	10 7/8"
B	Outside edge to center of drain hole Drain & overflow 16" x 35" Front Overflow only	1 3/8"
C	Total length	60"
D	Total width	32"
E	Bathing well length	49 1/4"
F	Bathing well width	21 1/8"
G	Deck width (skirt side)	3 3/4"
H	Deck width at drain end	2 1/8"
I	Height from bottom of bath to top deck	20"
J	Maximum water level	14 1/2"
K	Slope of backrest	17°
L	Deck width overflow side	2 1/8"
M	Outside edge to center drain	15 1/8"
N	Tile flange height	1"

Ⓐ AromaCloud® position Ⓑ Control position when factory-installed (Mia® or DOT)
● Indicates heated backrest (TMU) Ⓜ Indicates WarmTouchShell® position (Soaker)

Hot water supply required	The hot water supply should be 70% or more of the bath's total water capacity.
Turbine	Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	The Geysair® is located on the same side as the heated backrest. It must not be relocated. It must be connected to the hot water supply and be accessible (provide access). The turbine must be remotely installed. Citti bathtubs include an integrated tile flange, specify right or left.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

Approx. shipping weight	125 lb
Turbine power	550 W
Air heater	600 W

Warranty

Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty

Dimensions are subject to change; measured at external edges. Bathing well measured at air jet level. Tolerance: ±0.25" (±0.64 cm). Ensure bathtub is received prior to any construction. BainUltra® is not responsible for any preparatory work done before product arrival.