

Features

- Designed to work with handshowers to reduce chlorine and odor in water.
- Reduces chlorine and odor, controls scale, and inhibits the growth of bacteria and algae.
- Reduces skin dryness and irritation and is gentle on your hair.
- Filter system attaches to most exposed shower valves, handshower hoses and wall elbows with a simple threaded connection.
- 4.0 gallons per minute (15 liters per minute) flow rate at 60 psi.
- Filter media lasts up to 8,000 gallons (30,000 liters) or 6 months.
- Recommended filter cartridge replacement every 6 months.
- Intuitive filter replacement indicator.
- Optional subscription service automatically sends you a new filter every 3, 6, 9, or 12 months.
- Includes one filter cartridge.
- Simple, elegant design to complement a variety of bathroom styles.

Material

- Solid metal and acrylic construction.

Recommended Products/Accessories

K-30647 Shower Filter Replacement
K-8520 Hotel Handshower Kit
K-9059 Contemporary Handshower Kit
K-76330 Shower Arm Diverter, 3-way
K-76331 Shower Arm with Diverter, 2-way
K-76332 Wallmount Rainhead Arm w/3-way Diverter
K-76333 Wallmount Rainhead Arm w/2-way Diverter
K-76336 Gooseneck Rainhead Arm, w/3-way Diverter
K-76337 Gooseneck Rainhead Arm w/2-way Diverter
K-76466 Handshower Kit
K-98361 G90 Slidebar Kit
K-98362 Handshower Kit
K-99242 Deluxe Slidebar Kit with Handshower, 2.0 gpm
K-99243 Deluxe Slidebar Kit
K-99898 G110 Premium Handshower Kit
K-99899 Premium Slidebar Kit

Included Components

Product consists of:

K-30647 Shower Filter Replacement

Additional Components:

One filter cartridge



Codes/Standards

None Applicable

KOHLER® Water Filter Systems Five-Year Limited Warranty


See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
-------	------	-------------

	CP	Polished Chrome
--	----	-----------------

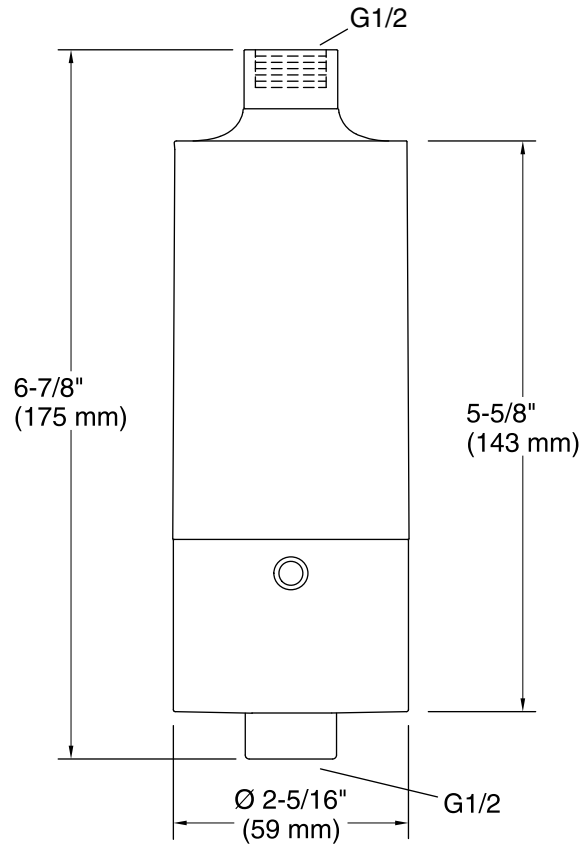

Technical Information

All product dimensions are nominal.

Drain included: No

Notes

Install this product according to the installation instructions.

Replace filter cartridge every 6 months.