







Location:

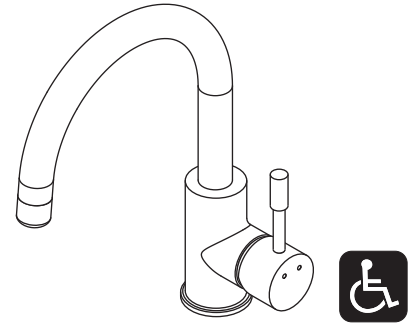


SPB-3510-1.5
Single Handle Bar Sink Faucet
Specification Submittal

<p>Model Numbers</p>	<p>Feature Highlights</p>
<p><input type="checkbox"/> SPB-3510 Single Handle Bar Sink Faucet</p> <p><input type="checkbox"/> SPB3510 Single Handle Bar Sink Faucet</p>	<ul style="list-style-type: none"> • Single hole mount configuration • 3 hole mount configuration for optional 8 inch deck plate • Quarter turn ceramic cartridge • Braided hose water supply connections • Standard swivel spout with option of rigid spout • Standard 1.5 gpm (5.7 L/min) flow rate • Faucet shall be metal construction, plated in standard polished chrome finish
<p>Options/ Modifications</p>	
<p><input type="checkbox"/> 0.5  0.5 gpm (1.9 L/min) flow restrictor</p> <p><input type="checkbox"/> 1.0  1.0 gpm (3.8 L/min) flow restrictor</p> <p><input type="checkbox"/> 1.2  1.2 gpm (4.5 L/min) flow restrictor</p> <p><input type="checkbox"/> Delete Suffix 1.5 2.2 gpm (8.3 L/min) flow restrictor</p> <p><input type="checkbox"/> DP 8 inch deck plate</p> <p><input type="checkbox"/> NA 1.5 gpm (5.7 L/min) laminar flow</p> <p><input type="checkbox"/> STN Satin Nickel finish</p> <p><input type="checkbox"/> MB Matte Black Finish</p> <p><input type="checkbox"/> BBZ Brushed Bronze Finish</p> <p>Note: Append appropriate -suffix to model number.</p>	
<p>Compliance</p>	<p>Warranty</p>
<p>-ASME A112.18.1/CSA B125.1</p> <p>-NSF/ANSI 61.9; NSF/ANSI 372</p> 	<p>Limited Lifetime - to the original end purchaser in consumer/residential installations.</p> <p>10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information.</p> 

Architectural/ Engineering Specification

Symmons Dia Single Handle Bar Sink Faucets _____ Includes Single hole mount configuration, 3 hole mount configuration for optional 8 inch deck plate, Quarter turn ceramic cartridge, Braided hose water supply connections, Standard swivel spout with option of rigid spout, Standard 1.5 gpm (5.7 L/min) flow rate, Faucet shall be metal construction, plated in standard polished chrome finish. 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, NSF/ANSI 61.9; NSF/ANSI 372 compliant. Available options: "0.5 - 0.5 gpm (1.9 L/min) flow restrictor", "1.0 - 1.0 gpm (3.8 L/min) flow restrictor", "1.2 - 1.2 gpm (4.5 L/min) flow restrictor", "Delete Suffix 1.5 - 2.2 gpm (8.3 L/min) flow restrictor", "DP - 8 inch deck plate", "NA - 1.5 gpm (5.7 L/min) laminar flow", "STN - Satin Nickel finish", "MB - Matte Black Finish", "BBZ - Brushed Bronze Finish".

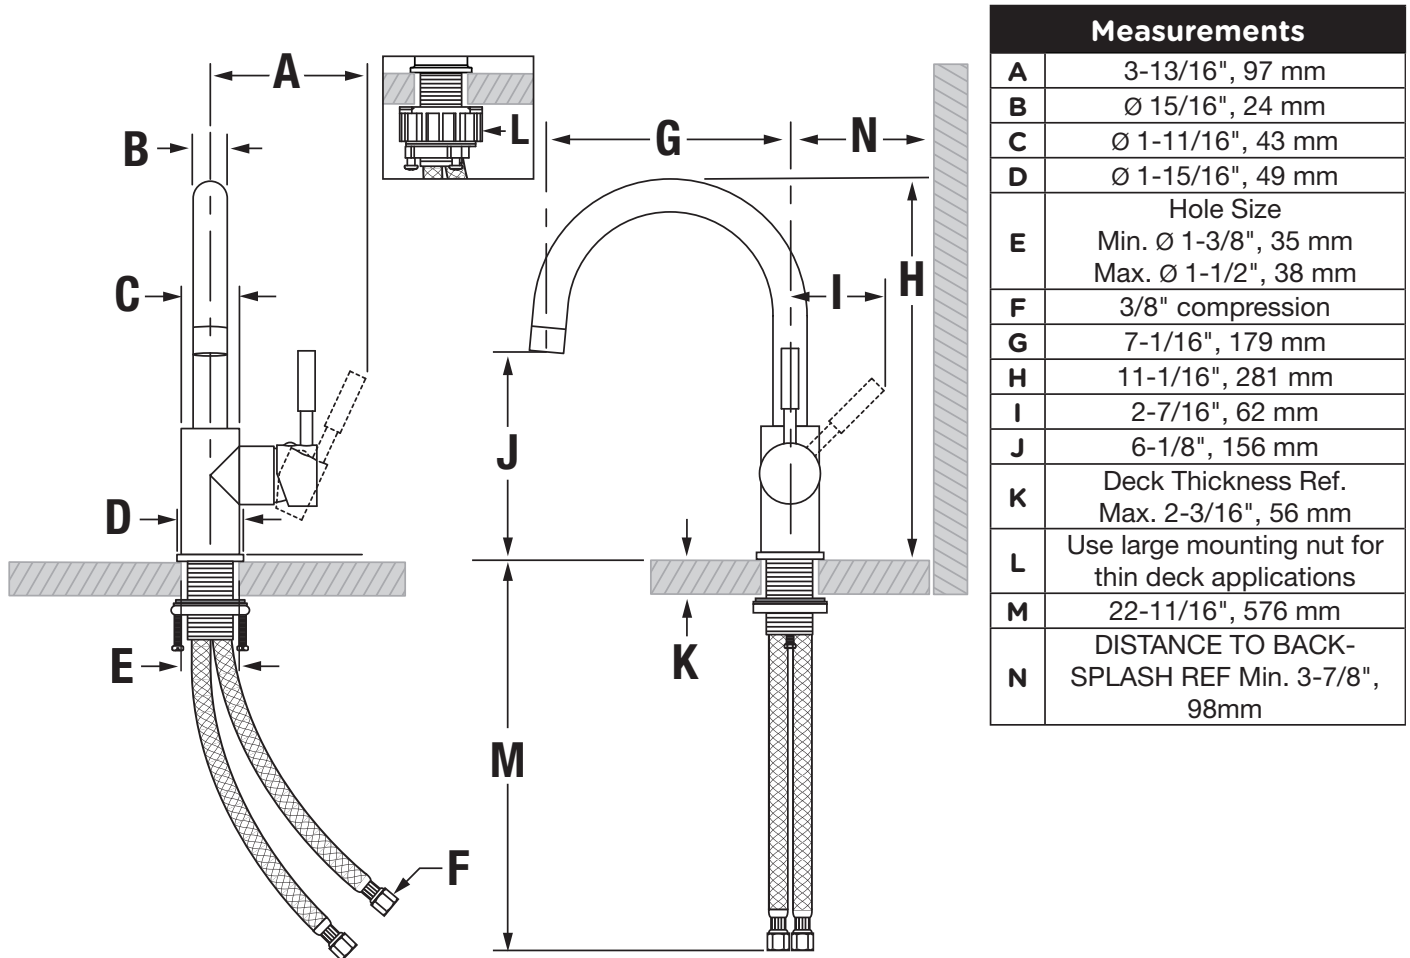Dimensions


Note: Dimensions are subject to change without notice.