



Rêve® Comfort Height®

One-piece compact elongated chair-height toilet
w/seat
K-3797

Features

- One-piece toilets integrate the tank and bowl into a seamless, easy-to-clean design.
- Compact elongated bowl offers added comfort while occupying the same space as a round-front bowl.
- Comfort Height® feature offers chair-height seating that makes sitting down and standing up easier for most adults.
- Dual flush offers a choice of 0.8 or 1.6 gpf (3.0 or 6.0 lpf).
- 2-1/8" (54 mm) glazed trapway.
- Skirted trapway simplifies cleaning.
- Quiet-Close™ elongated seat closes quietly.
- Coordinates with other products in the Rêve collection.



Installation

- Standard 12" (305 mm) rough-in.
- Supply line sold separately.

Water Conservation & Rebates

- Eligible for consumer rebates in some municipalities.

Recommended Products/Accessories

K-9384 Dual-flush Actuator
1023457 Wax Ring/Hardware Kit
1265114 Connector Hose
K-23726 Drain treatment

Included Components

Additional Components:

Dual flush push buttons
Installation kit
Installation template
Tank accessory pack
Tank cover
Toilet seat



Codes/Standards

ASME A112.19.2/CSA B45.1
ASME A112.19.14
DOE - Energy Policy Act 1992
EPA WaterSense®


KOHLER® Toilets and Seats Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes


Color tiles intended for reference only.

Color Code Description

	0	White
---	---	-------



Rêve® Comfort Height®
 One-piece compact elongated chair-height toilet
 w/seat
K-3797

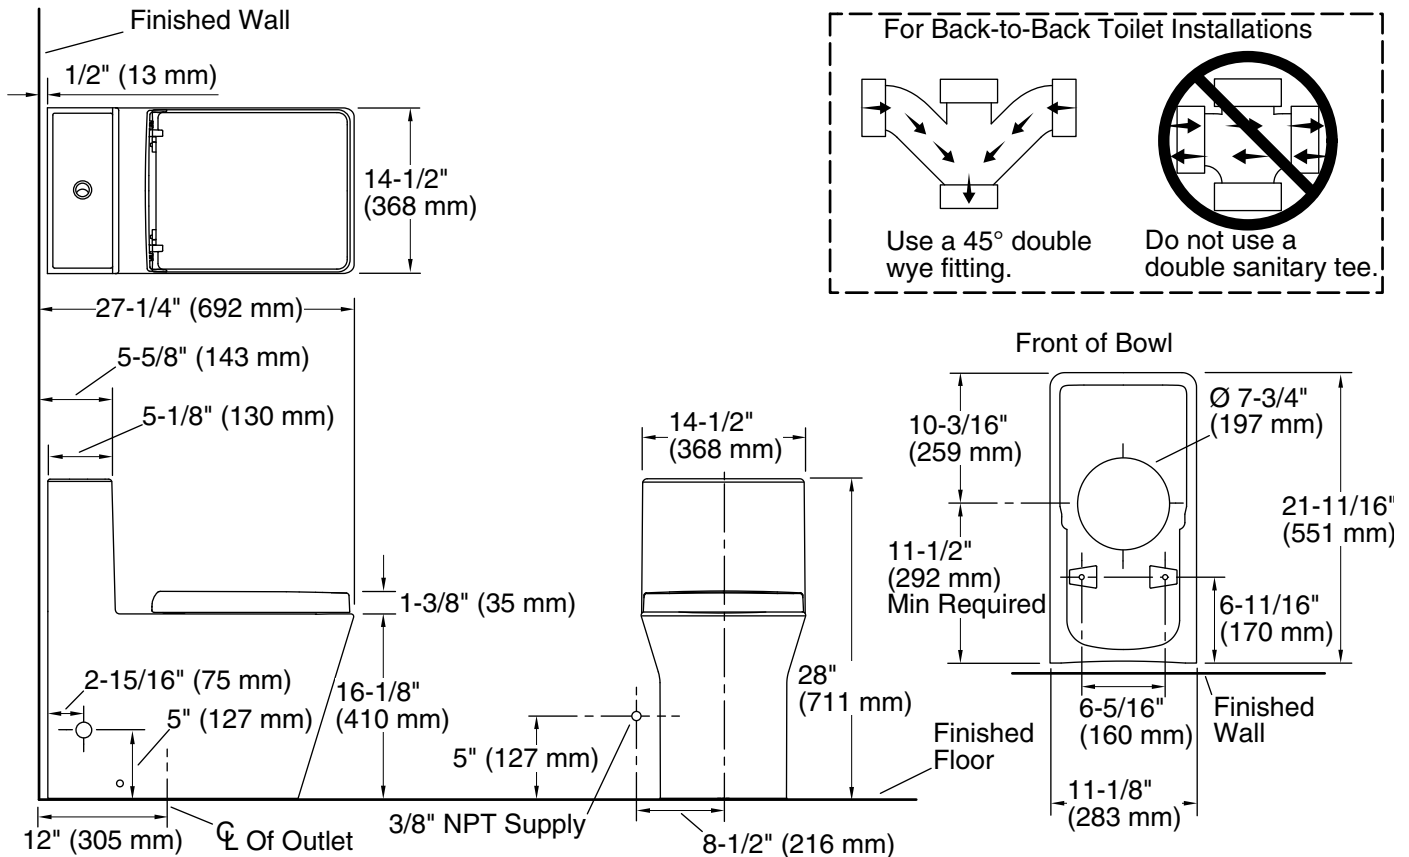

Technical Information

All product dimensions are nominal.

- Toilet type: One-piece, Floor-mount
- Waste Outlet: Floor
- Bowl shape: Elongated
- Trap passageway: 2-1/8" (54 mm)
- Water Consumption
 - Full: 1.6 gpf (6 lpf)
 - Reduced: 0.8 gpf (3 lpf)
- Water surface size: 4-1/8" x 5-1/2" (105 mm x 140 mm)
- Rim to water surface: 9-3/4" (248 mm)
- Rough-in: 12" (305 mm)
- Seat-mounting holes: 7-7/8" (200 mm)

Notes

- Install this product according to the installation instructions.
- For back-to-back toilet installations: Use only a 45° double wye fitting.