


Features

- Frameless design emphasizes glass and creates a sleek, minimalist look.
- Dual-sliding barn door style.
- Cushioned center guide provides smooth, quiet sliding action.
- Smooth, easy-to-clean wall jambs.
- 14-1/8" (359 mm) vertical handles.
- CleanCoat® technology creates a protective barrier that repels water, prevents dirt and minerals from collecting, and makes it easier to remove hard water spots.
- Innovative roller design simplifies installation and provides out-of-plumb adjustability while glass is installed.

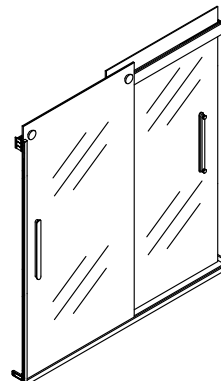

Material

- Frameless, 5/16" (8mm) thick Crystal Clear tempered glass.
- Anodized aluminum prevents rust and corrosion.

Installation

- Fits opening widths 54-5/8" – 59-5/8" (1387 – 1514 mm).
- Out-of-plumb adjustability simplifies installation.
- For residential use only.
- Not for use in hospitality.

Included Components

Additional Components:
Hardware kit

Codes/Standards

ANSI Z97.1
CPSC 16CFR 1201

STERLING® Bath and Shower Doors Five-Year Limited Warranty

See website for detailed warranty information.


Available Colors/Finishes

Color tiles intended for reference only.

Color	Code	Description
	BL	Matte Black
	BNK	Anodized Brushed Nickel
	S	Silver

Available Glass Options

Code	Description
G05	Clear

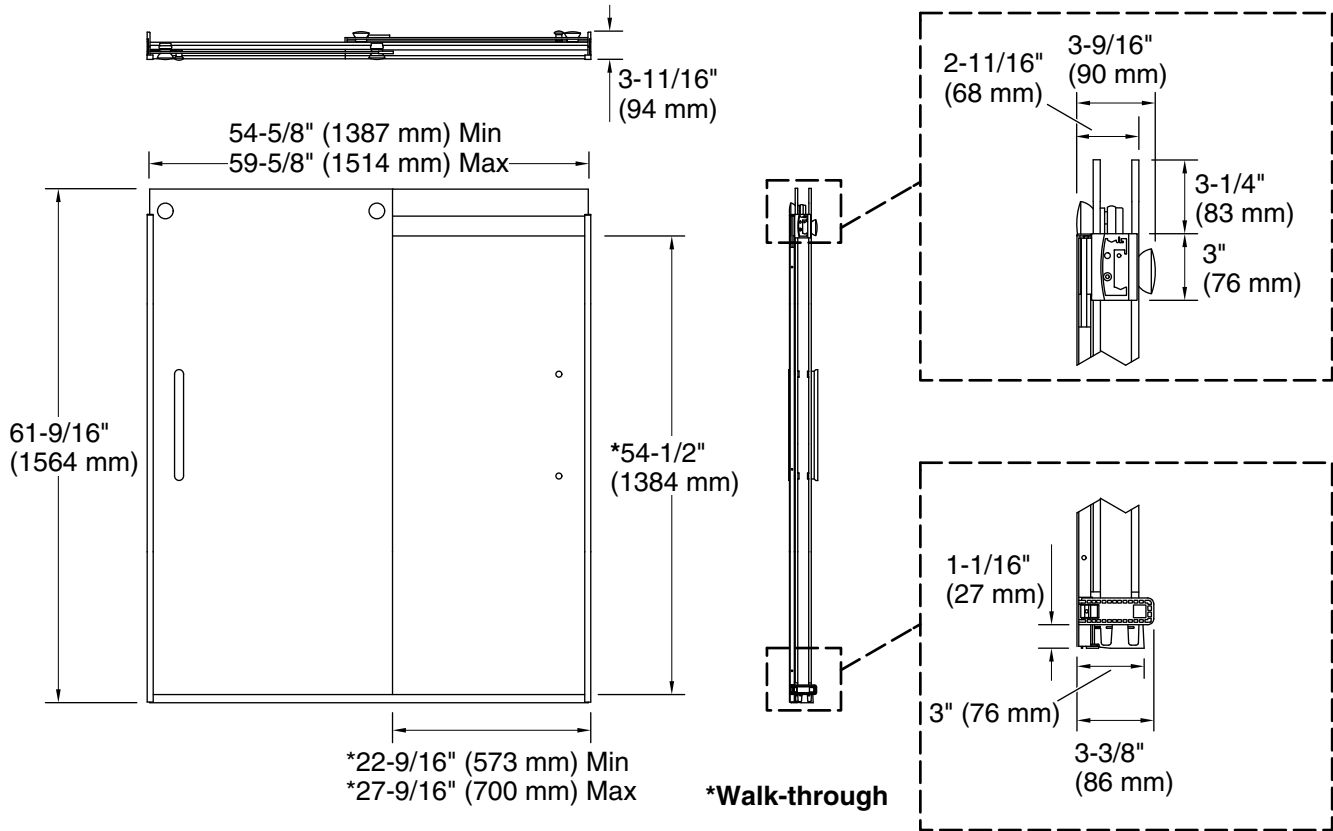

Technical Information

All product dimensions are nominal.

- Installation type: For bath installation
- Opening Width - Min: 54-5/8" (1387 mm)
- Opening Width - Max: 59-5/8" (1514 mm)
- Walk-through - Min: 22-9/16" (573 mm)
- Walk-through - Max: 27-9/16" (700 mm)
- Base-To-Wall Radius - Max: 1/2" (13 mm)
- Glass thickness: 5/16" (8 mm)
- Glass coating: CleanCoat®

Notes

The vertical opening should be a minimum of 63" (1600 mm) to allow for installation clearance.