







# Location:




## 9602-PLR, 9602-PLR-TRM, 9602PLRTRMTC Tub/Shower Trim Specification Submittal

Feature Highlights	Options/Modifications
<ul style="list-style-type: none"> <li>Origins Tub/Shower System or Trim</li> <li>Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with 9602-PLR)</li> <li>Adjustable stop screw to limit handle turn (included with 9602-PLR)</li> <li>Metal lever handle</li> <li>5-1/2" diverter tub spout</li> <li>1 mode showerhead with easy to clean nozzles</li> <li>2.0 gpm (7.6 L/min) flow restrictor</li> <li>Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish</li> <li>Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9602PLRTRMTC)</li> </ul>	<ul style="list-style-type: none"> <li><input type="checkbox"/> 1.2  1.2 gpm (4.5 L/min) flow restrictor</li> <li><input type="checkbox"/> 1.5  1.5 gpm (5.7 L/min) flow restrictor</li> <li><input type="checkbox"/> 1.75  1.75 gpm (6.6 L/min) flow restrictor</li> <li><input type="checkbox"/> L1 Less showerhead</li> <li><input type="checkbox"/> L4 Less head, arm and flange</li> <li><input type="checkbox"/> L6 Less tub spout</li> <li><input type="checkbox"/> L7 Less handle</li> <li><input type="checkbox"/> VP Vandal resistant escutcheon screws in place of standard screws</li> <li><input type="checkbox"/> STN Satin Nickel finish</li> <li><input type="checkbox"/> B Brass escutcheon (chrome only)</li> <li><input type="checkbox"/> X Integral service stops - allows water shut-off at valve for service</li> </ul> <p>Note: Append appropriate suffix to model number.</p>
<h3>Model Numbers</h3> <ul style="list-style-type: none"> <li><input type="checkbox"/> 9602-PLR Tub/Shower Trim with Temptrol Pressure Balancing Tub/Shower Valve</li> <li><input type="checkbox"/> 9602-PLR-TRM Tub/Shower Trim, Temptrol Pressure Balancing Tub/Shower Valve ordered separately</li> <li><input type="checkbox"/> 9602PLRTRMTC Tub/Shower Trim with TA-10 flow control spindle and T-12A cap assembly, must order Temptrol valve with Test Cap</li> </ul>	<h3>Warranty</h3> <p><b>Limited Lifetime</b> - to the original end purchaser in consumer/residential installations.</p> <p><b>10 Years</b> - for commercial/industrial installations. Refer to <a href="http://www.symmons.com/warranty">www.symmons.com/warranty</a> for complete warranty information.</p> 
<h3>Compliance</h3> <ul style="list-style-type: none"> <li>ASME A112.18.1/CSA B125.1</li> <li>WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min)</li> <li>Buy American Act (9602-PLR only)</li> </ul>  	

## Architectural/ Engineering Specification

Symmons Museo \_\_\_\_\_ With Origins Tub/Shower System or Trim, Requires Temptrol® Pressure Balancing Tub/Shower Valve (included with 9602-PLR), Adjustable stop screw to limit handle turn (included with 9602-PLR), Metal lever handle, 5-1/2" diverter tub spout, 1 mode showerhead with easy to clean nozzles, 2.0 gpm (7.6 L/min) flow restrictor, Components shall be metal and nonmetallic construction, plated in standard Polished Chrome finish, Available with TA-10 flow control spindle and T-12A cap assembly for Temptrol valve bodies installed with Test Cap (order p/n 9602PLRTRMTC) . 10 Year Commercial Warranty. ASME A112.18.1/CSA B125.1, WaterSense 1.5 gpm (5.7 L/min), 2.0 gpm (7.6 L/min), complaint. Available options include: "1.2 - 1.2 gpm (4.5 L/min) flow restrictor", "1.5 - 1.5 gpm (5.7 L/min) flow restrictor", "1.75 - 1.75 gpm (6.6 L/min) flow restrictor", "L1 - Less showerhead", "L4 - Less head, arm and flange", "L6 - Less tub spout", "L7 - Less handle", "VP - Vandal resistant escutcheon screws in place of standard screws", "STN - Satin Nickel finish", "B - Brass escutcheon (chrome only)", "X - Integral service stops - allows water shut-off at valve for service".

## Dimensions

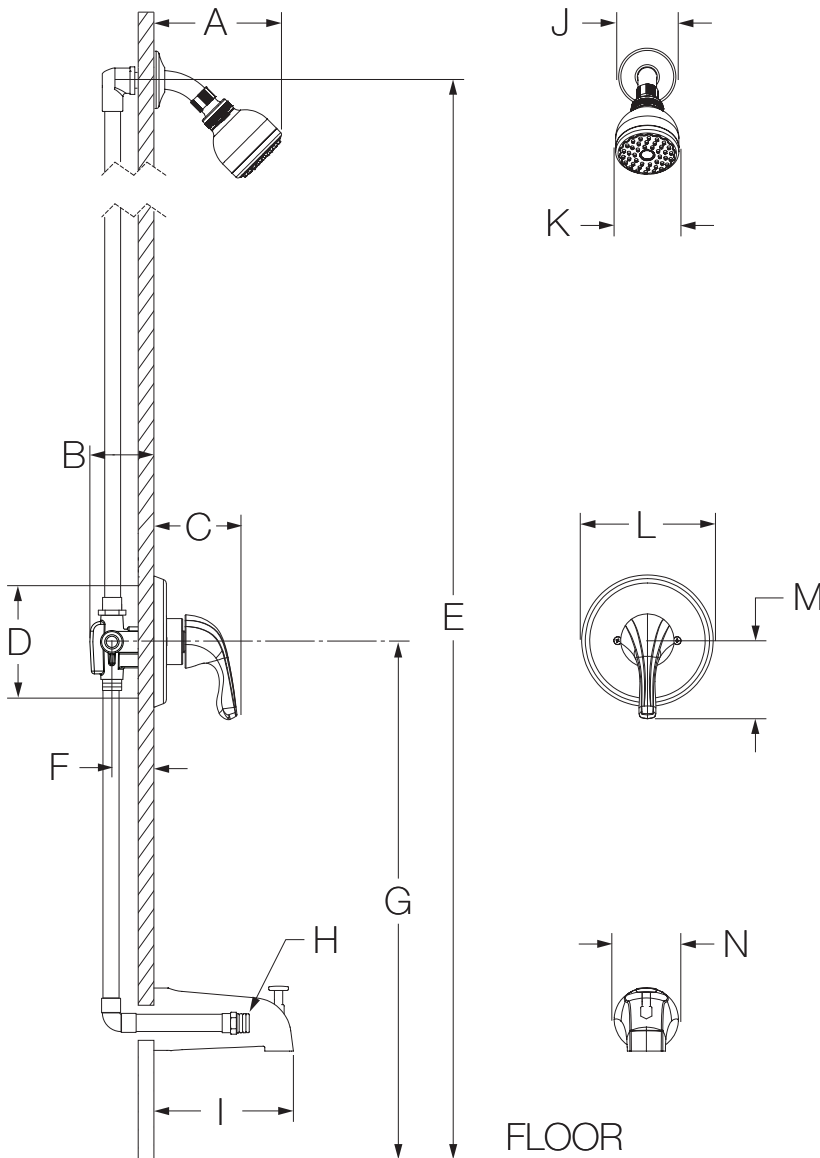

Measurements	
<b>A</b>	6-3/8", 162 mm
<b>B</b>	3-1/2", 89 mm
<b>C</b>	3-5/8", 92 mm
<b>D</b>	Shower Valve Hole Size Min. Ø 3", 76 mm Max. Ø 4", 102 mm
<b>E</b>	Ref. 77", 1956 mm
<b>F</b>	Rough-in 2-3/8" ± 1/2", 60 mm ± 13 mm
<b>G</b>	Ref. 32", 813 mm
<b>H</b>	Male 1/2" NPT fitting must protrude 4" (102 mm) from finished wall
<b>I</b>	5-1/4", 133 mm
<b>J</b>	Ø 2-1/2", 64 mm
<b>K</b>	Ø 2-3/4", 70 mm
<b>L</b>	Ø 5-3/4", 146 mm
<b>M</b>	3-3/8", 86 mm
<b>N</b>	Ø 2-1/2", 64 mm

Notes:

- 1) Valve body and piping not included and shown as reference only.
- 2) Plaster shield (p/n T-176) for dry wall, plaster or other type walls 1/2" or greater.
- 3) All dimensions measured from nominal rough-in (see F as reference).
- 4) Dimensions subject to change without notice.