


Accessories for HydroStat Controls

Outdoor Sensor Kit OS-100 Provides outdoor reset functionality.

For HydroStat Models 3200-Plus and 3250-Plus only

48-140 Kit includes: outdoor sensor with 9' cable (additional wire to be added in field as needed), sensor mounting bracket with 2 screws, wire clip, 2 spade connectors and knockout wire bushing. See photo on front cover.

Electro-Well™ Models Enables HydroStat's low water cut-off function.

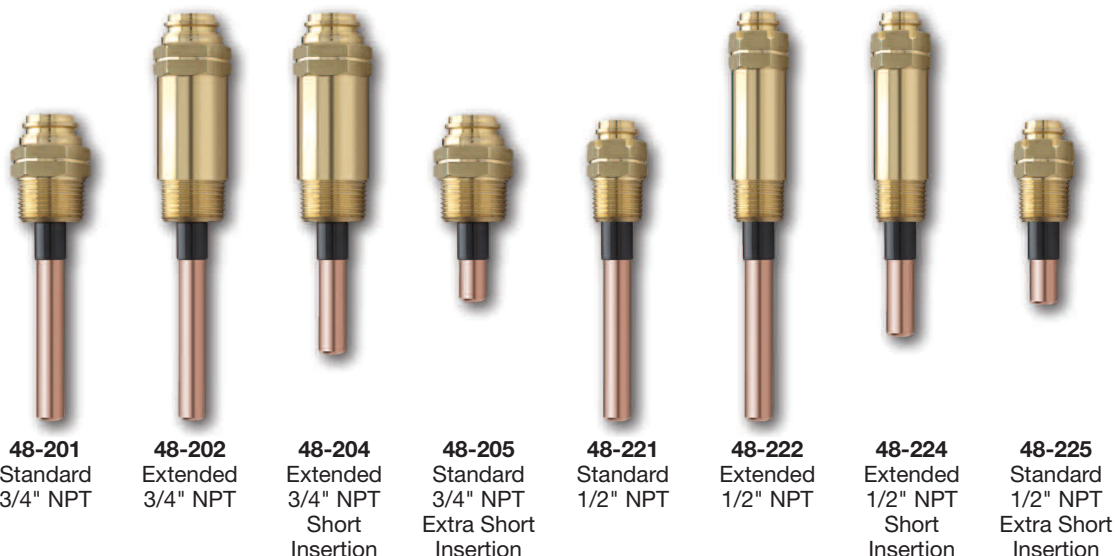

Remote Mounting Options

For all HydroStat Models except 3000 Series



Wall/Jacket Mounting Kit
Kit includes: 2 mounting brackets, remote sensor, plastic grommet, rubber well cap, 4 #8x1/2" self-tapping screws.

- 48-101** HydroStat Wall/Jacket Mounting Kit with 2' sensor
- 48-102** HydroStat Wall/Jacket Mounting Kit with 4' sensor
- 48-103** HydroStat Wall/Jacket Mounting Kit with 10' sensor
- 48-104** HydroStat Wall/Jacket Mounting Kit with 20' sensor



Pipe Mounting Kit
Kit includes: mounting bracket for 1" to 2" pipe, remote sensor, plastic grommet, rubber well cap.

- 48-121** HydroStat Pipe Mounting Kit with 4' sensor

Specifications

Burner Contacts
Circulator Contacts
Operating Range – Low Limit
Operating Range – High Limit
Operating Range – Differential

Model 3200-Plus

30 VA@24 VAC
5.8 FLA, 34.8 LRA@120 VAC
Off or 110°F - 200°F
100°F - 220°F
Automatic – will vary between 10° and 20° subtractive based on control settings and boiler temperature

Model 3250-Plus

7.4 FLA, 44.4 LRA@120 VAC
5.8 FLA, 34.8 LRA@120 VAC
Off or 110°F - 200°F
100°F - 220°F
Automatic – will vary between 10° and 20° subtractive based on control settings and boiler temperature



PATENT NO. 7,891,572