
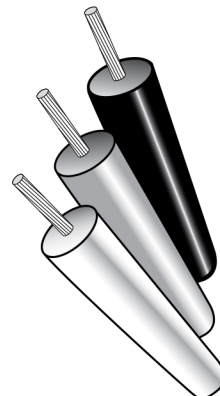


**Westwood**  
*by Beckett*
**CABLE**

| Cable Type     | <br>UL<br>Recognized<br>Component | 25'<br>Roll | 100'<br>Roll | 1,000'<br>Roll |
|----------------|--|-------------|--------------|----------------|
|                |  |             |              |                |
| GTO-15         | Yes  | E60-25      | E60-100      | E60-1000       |
| White Silicone | -  | -           | E62-100      | -              |
| Red Silicone   | Yes  | E63-25      | E63-100      | E63-1000       |


**GTO-15  
(black)**

Large .275" outside diameter fits Rajah terminals perfectly. Withstands more than **15,000 VAC** with low current leakage. Resists arc-over, tracking, and burning. Tested to withstand conditions of heat, oil, and moisture. No. 14 gauge, 19 x 26 stranded tinned copper wire. All vinyl insulation affords low temperature flexibility. Flame retardant, will not support combustion. Tough and abrasion resistant, yet easy stripping. Temperature range: **UL Recognized** to 105<sup>0</sup> C (221<sup>0</sup> F)

**White  
Silicone**

Large .275" outside diameter fits Rajah terminals perfectly. Withstands more than **10,000 VAC** and **25,000 VDC** with low current leakage. No. 16 gauge, 19 x 26 stranded tinned copper wire. Natural Silicone insulation, high dielectric strength.  
Temperature range: -65<sup>0</sup> F to 400<sup>0</sup> F (-54<sup>0</sup> C to 204<sup>0</sup> C)

**Red  
Silicone**

Large .275" outside diameter fits Rajah terminals perfectly. Withstands more than **10,000 VAC** and **25,000 VDC** with low current leakage. No. 16 gauge, 19 x 26 stranded nickel plated copper wire. Natural Silicone insulation, high dielectric strength.  
Temperature range: -65<sup>0</sup> F to 482<sup>0</sup> F (-54<sup>0</sup> C to 250<sup>0</sup> C) **UL Recognized**

**CABLE ASSEMBLIES and FIBERGLAS BRAID**

| Item No. | Ref. No. | Description  |
|----------|----------|--|
| E64      | #3250    | Red Silicone wire <b>high temperature</b> cable assembly with protective <b>metal braid</b> . Temperature range -65 <sup>0</sup> F to 450 <sup>0</sup> F. Overall length is 32-1/2".                                 |
| E64-5    | #RS-3350 | Red Silicone wire <b>high temperature</b> cable assembly with red Silicone <b>boots</b> . Temperature range -65 <sup>0</sup> F to 450 <sup>0</sup> F. Withstands 10,000 VAC / 25,000 VDC. Overall length is 33-1/2". |

