

# Deck-mount bath spout with flare design K-72777

## **Features**

- 9" (229 mm) spout reach.
- 3" (76 mm) high nondiverter spout.
- Variety of handle style options (sold separately).
- Nondiverter spout.
- 15 gpm (gallons per minute) bath faucet flow rate.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.
- Coordinates with other products in the Artifacts collection.
- Handle trim sold separately.

# Material

- Brass.
- KOHLER finishes resist corrosion and tarnishing.

#### Installation

Finished deck-mount installation only.

# **Required Products/Accessories**

K-T98071-3M Deck-mount Bath Faucet Trim or

K-T98071-4 Deck-mount Bath Faucet Trim

or

K-T98071-9M Bath- or Deck-Mount Handles

# **Recommended Products/Accessories**

K-23723 Faucet cleaner

# **Included Components**

Additional Components:

1354692



# Codes/Standards

ASME A112.18.1/CSA B125.1

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes


Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant® Polished Nickel
	BN	Vibrant® Brushed Nickel
	BV	Vibrant® Brushed Bronze
	2BZ	Oil-Rubbed Bronze
	2MB	Vibrant® Brushed Moderne
	\/\IT	Brass
	VNT	Vintage Nickel





# Deck-mount bath spout with flare design K-72777

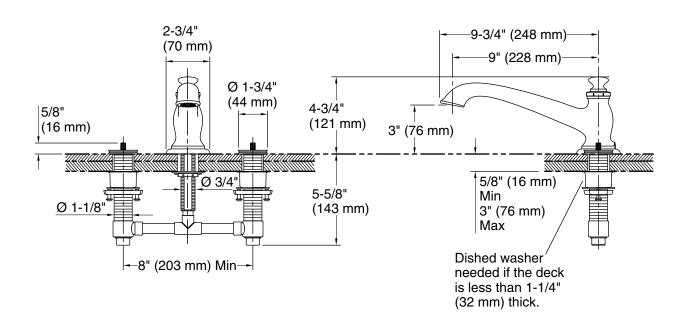

## **Technical Information**

All product dimensions are nominal.

Drain included: No

Spout:

Spout reach: 9" (229 mm)

#### **Notes**

IMPORTANT! Artifacts deck-mount handles are only compatible with the valve included with the Artifacts deck-mount faucets. Do not install to a K-300 bath valve.

IMPORTANT! For K-T98071-9M models, the handle swings up and toward the user. Ensure that the handle will not interfere with the bath fixture during operation.

Install this product according to the installation guide.

For a finished bath deck/rim less than 5/8" (16 mm) thick: Install wood reinforcing material to the underside of the deck/rim. The combined thickness of the reinforcing material and the deck/rim must not exceed 3" (76 mm).

