



Standard Filter Housing

Features

- LF brass threaded port
- Built-in manual bleed valve bottom
- Top seated O-Ring gasket
- Accepts most standard 10" cartridges
- Fast cartridge replacement

Specification

- Max pressure : 125 psi
- Operating temperature : 40°F (4°C)~100°F (38°C)



FDA CFR-21 compliant materials


Clear Standard Housing

PART NO.	SIZE	PORT	SUMP	CAP	CASE QTY
4PRO34SFH	10"	LF BRASS 3/4" NPT	CLEAR	BLACK	12
4PRO1SFH	10"	LF BRASS 1" NPT	CLEAR	BLACK	12

Complete with black cap(PP), clear sump(AS), O-Ring(silicone), plastic wrench, plastic bracket, mounting screws and anchors.

Specification

Silicone O-Ring for 4PRO34SFH and 4PRO1SFH standard filter housing

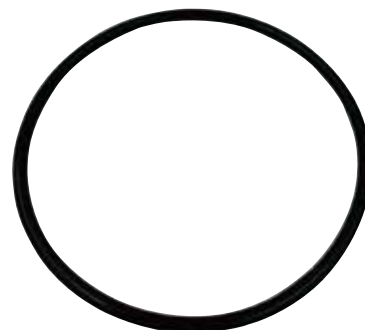

FDA CFR-21 compliant materials

4PROSOR

▲WARNING

Do not use where the water is microbiologically unsafe or quality without adequate disinfection before or after the unit.