




SUBMITTAL DATA SHEET

One Way Cassette Heat Pump System	
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____

Set Model	Indoor unit model: CCOXHA4C12
Certified	  

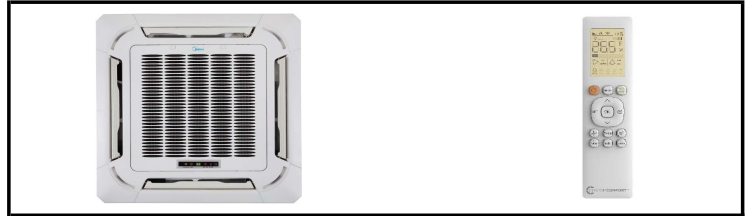

REFRIGERANT PIPE DATA		
Throttle type	Indoor unit	N/A
	Outdoor unit	EXV
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	41.62
Refrigerant precharge	(ft)	25.0
Additional charge for each ft	(oz/ft)	0.16
Liquid side/ Gas side(indoor)	(inch)	1/4" / 1/2"
Liquid side/ Gas side(outdoor)	(inch)	1/4" / 1/2"
Max. pipe length	(ft)	82.0
Max. difference in level	(ft)	32.8
Connection method		Flared
REFRIGERANT PIPE DATA		
Indoor(cooling)	(Deg. °F)	62~90
Indoor(heating)	(Deg. °F)	32~86

INDOOR UNIT DATA			
Indoor fan motor			
Model			ZKFP-46-8-1
Qty			1
Input	(W)		45.00
Output	(W)		46.0
RLA	(A)		0.00
Speed(Hi/Mi/Lo)	(r/min)		/
Air flow & Noise level			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)		//335.29/282.35/241.18
Indoor noise level (Hi/Med/Lo)	[dB(A)]		40.5/35.5/31.5
Dehumidification	(L/H)		1.69
Indoor unit			
Dimension (WxDxH)	(inch)		22.44x22.44x10.24
Packing(WxDxH)	(inch)		26.06x26.06x12.48
Net/Gross weight	(lbs.)		35.27/41.01

