

## DESCRIPTION

- Metal construction with chrome plated finish
- Includes metallic shower arm and flange, non-metallic showerhead and non-metallic diverter tub spout

## OPERATION

- Lever style handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^\circ$

## FLOW

- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi

## CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

## STANDARDS


- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

- **ADA**  for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit [www.moen.com/support](http://www.moen.com/support) for complete details and limitations

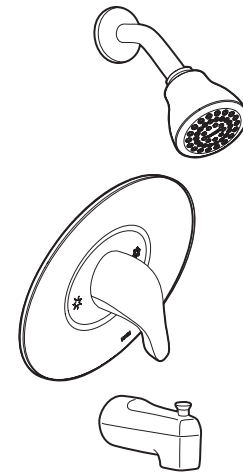

## CHATEAU® POSI-TEMP® Single-Handle Tub/Shower Trim Kit

**Models:** TL2368EP series - shower trim only  
TL2369EP series - tub/shower trim

**Valves:** 62300 series  
2500 series

