

SPECIFICATIONS

Features/Benefits

- 1.2 gpm (4.5 L/min) Max Flow @ 60 psi with Aerated Water Stream
- Alternative Flow Rates Available with Spray Water Stream
 - 1.0 gpm (3.8 L/min) When Used with GA66G51250N Aerator
 - 0.5 gpm (1.9 L/min) When Used with GA66G51254N Aerator
- 4 3/4" Spout Height, 4 5/16" Spout Reach
- Ceramic Disc Cartridges
- 3-Hole Mount
- 6"- 12" Installation
- Optional Temperature Indicators Included



Drain Type

- G0043375 With 50/50 Touch Down Drain Assembly
- G0043376 With Metal Touch Down Drain Assembly
- G0043377 Without Drain

Available Color/Finishes


Chrome

Please see gerber-us.com or current price list for available finishes. Finish is defined by additional suffix.

Mount Type



Standards & Certifications

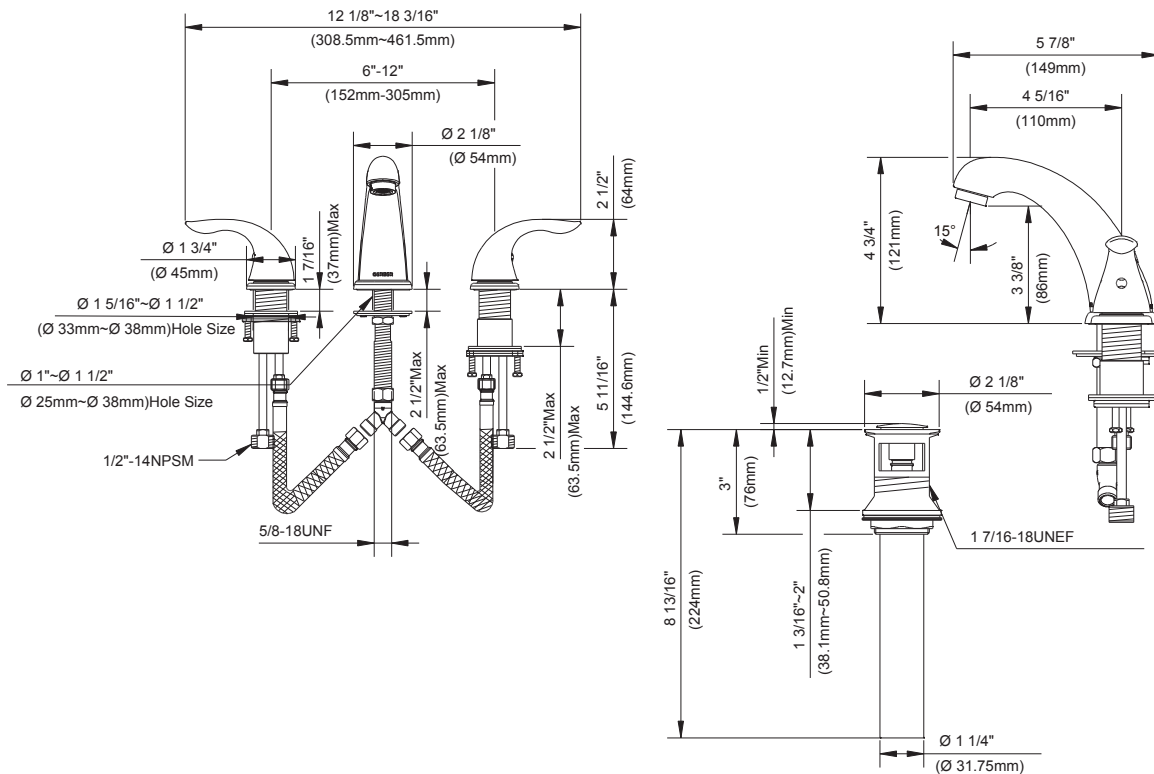

Submittal Information:

Name: _____
 Location: _____

Contractor: _____
 Contact #: _____