


Royal® Model Flushometer

117

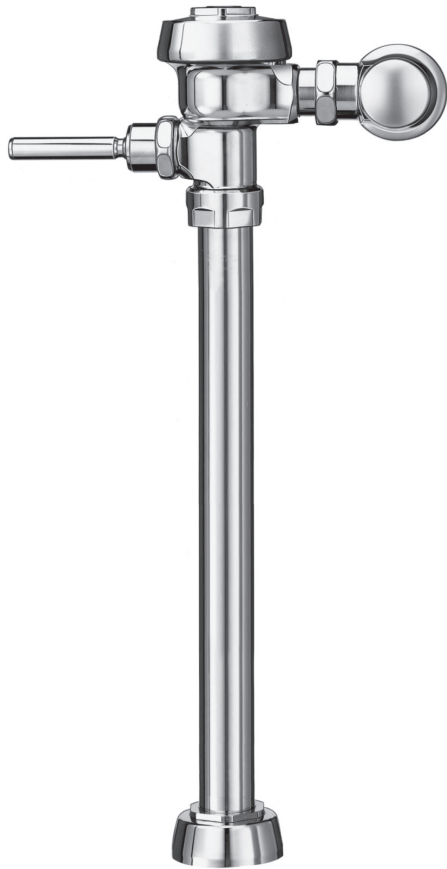

Description

Exposed Service Sink Flushometer, for use with top spud Service Sinks.

Flush Cycle

Model 117 (6.5 gpf/24.6 Lpf)

Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Service Sink Flushometer with the following features:

- ADA Compliant Metal Oscillating Non-Hold-Open Handle with Triple Seal Handle Packing
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop
- Free Spinning Vandal Resistant Stop Cap
- Adjustable Tailpiece
- High Back Pressure Vacuum Breaker Flush Connection with One-piece Bottom Hex Coupling Nut
- Spud Coupling and Flange for 1-1/2" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Set Screw Wall Flange
- High Copper, Low Zinc Brass Castings for Dezincification Resistance
- Non-Hold-Open Handle, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flush Accuracy Controlled by CID Technology
- Diaphragm, Handle Packing, Stop Seat and Vacuum Breaker molded from PERMEX® Rubber Compound for Chloramine Resistance

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance to the applicable sections of ASSE 1037, ANSI/ASME 112.19.2.


Variations

- H** Handle on Front of Valve
- HL-3** 3" Metal Oscillating Push Button on front of valve
- O** Offset Vacuum Breaker, Specify: 1" - 1½" - 2"
- YJ** Split Ring Pipe Support
- YK** Solid Ring Pipe Support
- SG** SaniGuard® Antimicrobial coating protects Handle*

* SaniGuard does not protect users or others against disease-causing bacteria.

Accessories

See Accessories Section of the Sloan catalog for details on these and other Flushometer variations.

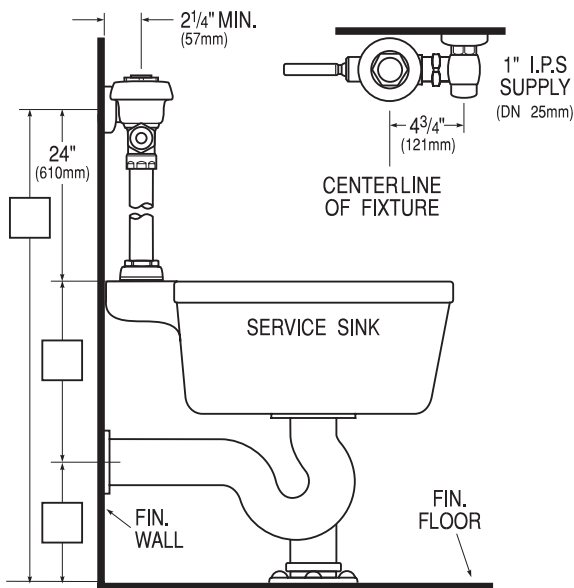

Made In The
USA



This space for Architect/Engineer approval

Job Name _____	Date _____
Model Specified _____	Quantity _____
Variations Specified _____	
Customer/Wholesaler _____	
Contractor _____	
Architect _____	

The information contained in this document is subject to change without notice.

SLOAN

SLOAN • 10500 SEYMOUR AVENUE • FRANKLIN PARK, IL 60131

Ph: 1-800-982-5839 • Fax: 1-800-447-8329 • www.sloanvalve.com