


"QUALITY PUMPS SINCE 1939"

Product information presented here reflects conditions at time of publication. Consult factory regarding discrepancies or inconsistencies.

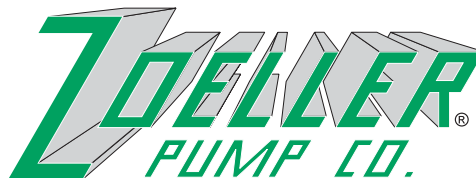

SECTION: 2.10.030

FM2058

0610

Supersedes

0909

MAIL TO: P.O. BOX 16347 • Louisville, KY 40256-0347
SHIP TO: 3649 Cane Run Road • Louisville, KY 40211-1961
(502) 778-2731 • 1 (800) 928-PUMP • FAX (502) 774-3624

visit our web site:
www.zoeller.com

COMPARE THESE FEATURES

- 115 Volts single phase/60 Hz
- Self-priming 7 feet or less above liquid source
- Lifts water from 15 feet below pumping level
- Garden hose connections
- Use to remove water from:
 - ✓ waterbeds
 - ✓ washing machines
 - ✓ water heaters
- Use to add propylene glycol anti-freeze to radiant heating lines
- Maximum temperature for dewatering-130°F (54°C)
- 90 days limited warranty

Model 311

- Transfers up to 337 gallons per hour
- Includes extra impeller, gasket and one 6 ft. hose with strainer
- 6 ft. power cord

Model Number	Voltage	Max. Flow 1' Head	Shut-off Head
311-0002	115VAC	337 GPH	39'


Replacement Impeller/Gasket Kit P/N 015391

Model 311

"MIGHTY MOVER"

PORTABLE NON-SUBMERSIBLE UTILITY PUMP

FOR DEWATERING

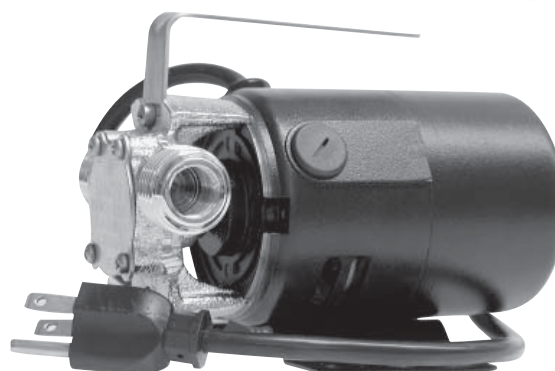

Model 311



Tested to UL Standard UL778 and
Certified to CSA Standard C22.2 No. 108

Product may not be exactly as pictured.