


EP flow-through multi-port elbows

Project Information

Job name:	Location:
Engineer:	Date submitted:
Contractor:	Submitted by:
Manufacturer's representative:	Approved by:

Technical data

Material	Engineered Polymer
End type 1	ProPEX 3/4"
End type 2	ProPEX 3/4"
End type 3	ProPEX 1/2"
Temp/pressure ratings	73 °F (23 °C) at 160 psi (11 bar)
	180 °F (82 °C) at 100 psi (6.9 bar)
	200 °F (93 °C) at 80 psi (5.5 bar)

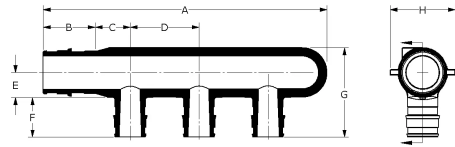

Product information and application use

Engineered polymer (EP) flow-through multi-port elbows feature an integrated 3/4" ProPEX® elbow with 1/2" ProPEX branch outlets. The elbows are designed for slab-on-grade, potable-plumbing applications to eliminate the need for multiple connections.

Part name	Part no.	A [inch]	B [inch]	C [inch]	D [inch]	E [inch]	F [inch]	G [inch]	H [inch]	I [inch]	Cv Through
EP Flow-through Multi-port Elbow, 3 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2235577	6.17	0.955	0.625	1.25	0.467	0.719	1.87	1.18	-	7.1
EP Flow-through Multi-port Elbow, 4 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2245577	7.42	0.955	0.625	1.25	0.467	0.719	1.87	1.18	0.955	7.1

Part name	Part no.	Weight per UOM [lbs/UOM]	Equivalent length through [ft]
EP Flow-through Multi-port Elbow, 3 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2235577	0.1	8.76
EP Flow-through Multi-port Elbow, 4 (1/2") outlets, 3/4" x 3/4" ProPEX	Q2245577	0.14	8.88

Installation

Any product designed to mount 1" copper pipe is suitable for use as a mounting bracket. For more information, refer to the Uponor Piping Systems Installation Guide.

Related applications

PEX-a Plumbing Systems

Codes

UPC|IBC|IRC|IPC|NPC of Canada|UMC|NSPC|IMC

Standards

ASTM E814|ULC S115|ASTM F877|ASTM F1960|CSA B137.5|ULC S102.2|ASTM E119|UL 263|NSF-61|ULC S101|NSF-14

Listings

IAPMO-ES|HUD MR 1269|ICC-ES-PMG|cNSFus-pw|UL|U.P.Code|cQA|us P321

Footnotes

-

Contact information

Uponor Inc.
5925 148th Street West
Apple Valley, MN 55124
T 800.321.4739
F 952.891.2008

Uponor Ltd.
6510 Kennedy Road
Mississauga, ON L5T 2X4
T 888.594.7726
F 800.638.9517