



# Valton™

Single-handle kitchen sink faucet  
24279

## Features

- 8-15/16" (227 mm) spout reach.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).
- Single lever handle makes adjusting water temperature easy.
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage.
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance.

## Material

- Premium metal construction for durability and reliability.
- Durable STERLING finishes built to resist corrosion.

## Installation


- Single-hole or three-hole installation (escutcheon plate included).
- Flexible supply lines simplify installation.

## Adapters, Rough-in and Extension Kits

1327990                                      Range: 2-1/2" (64 mm) -  
4-5/8" (117 mm)

## Included Components

Additional Components:  
Escutcheon plate

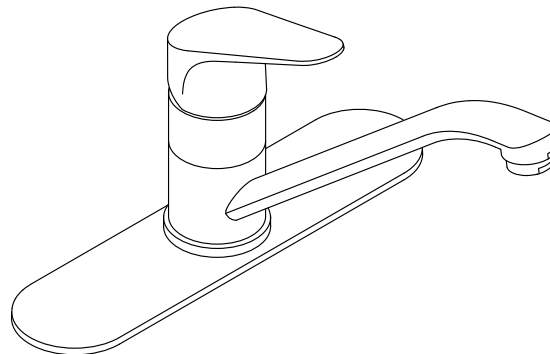

**ADA**   **CSA B651**

## Codes/Standards

ASME A112.18.1/CSA B125.1  
NSF/ANSI 61  
NSF/ANSI 372  
All applicable US Federal and State material regulations  
DOE - Energy Policy Act 1992  
California Energy Commission (CEC)  
ADA  
ICC/ANSI A117.1  
CSA B651


## STERLING® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

## Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CP	Polished Chrome

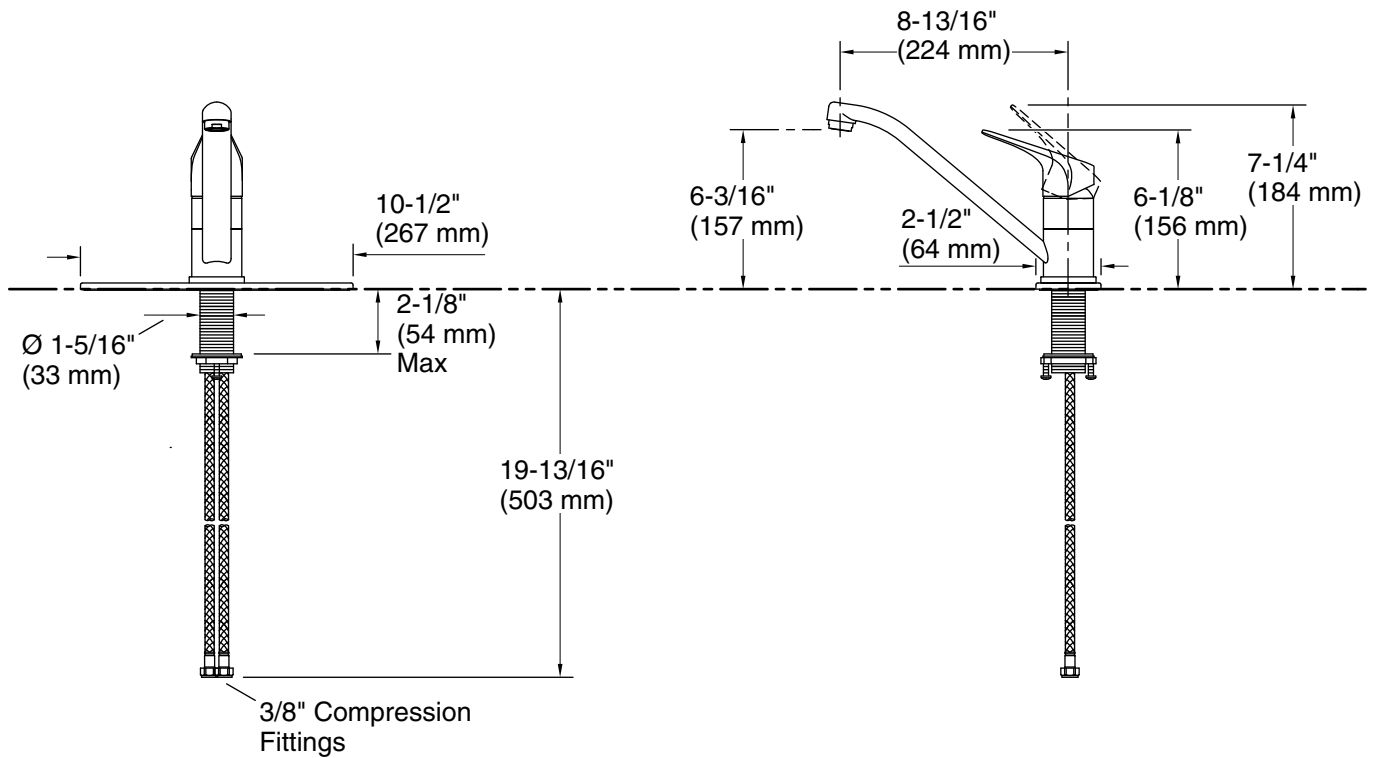

**Technical Information**

All product dimensions are nominal.

Drain included: No

**Spout:**

Spout reach: 8-13/16" (224 mm)

**Notes**

Install this product according to the installation instructions.

ADA, CSA B651 compliant when installed to the specific requirements of these regulations.