Features
- A single handle controls both on/off activation and temperature setting
- 9-1/8" (232 mm) high-arc spout
- 8.0 gpm (30.3 lpm) maximum bath faucet flow rate at 45 psi (3.1 bar)
- Includes Shift+™ Round 1.75 gpm handshower and 60" hose
- 1.75 gpm (6.6 lpm) maximum handshower flow rate at 80 psi (5.5 bar)
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Part of the Occasion bathroom faucet and accessory collection

Material
- Premium metal construction for durability and reliability
- KOHLER finishes resist corrosion and tarnishing

Installation
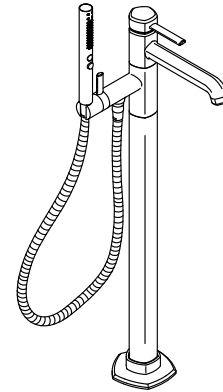- Floor-mount

Required Products/Accessories
For freestanding installation
    K-97339 Mounting block for select floor-mount bath fillers

Recommended Products/Accessories
    K-23723 Faucet cleaner
    K-27060 18" towel bar
    K-27061 24" towel bar
    K-27062 24" double towel bar
    K-27063 Towel ring
    K-27064 Vertical toilet paper holder
    K-27065 Pivoting toilet paper holder
    K-27069 Robe hook
    K-27128 Toilet paper holder with tray

Included Components
    K-21335-G Round two-function handshower, 1.75 gpm

WaterSense
Meets EPA Criteria
Certified by
IAPMO R&T

Codes/Standards
ASME A112.18.1/CSA B125.1
DOE - Energy Policy Act 1992
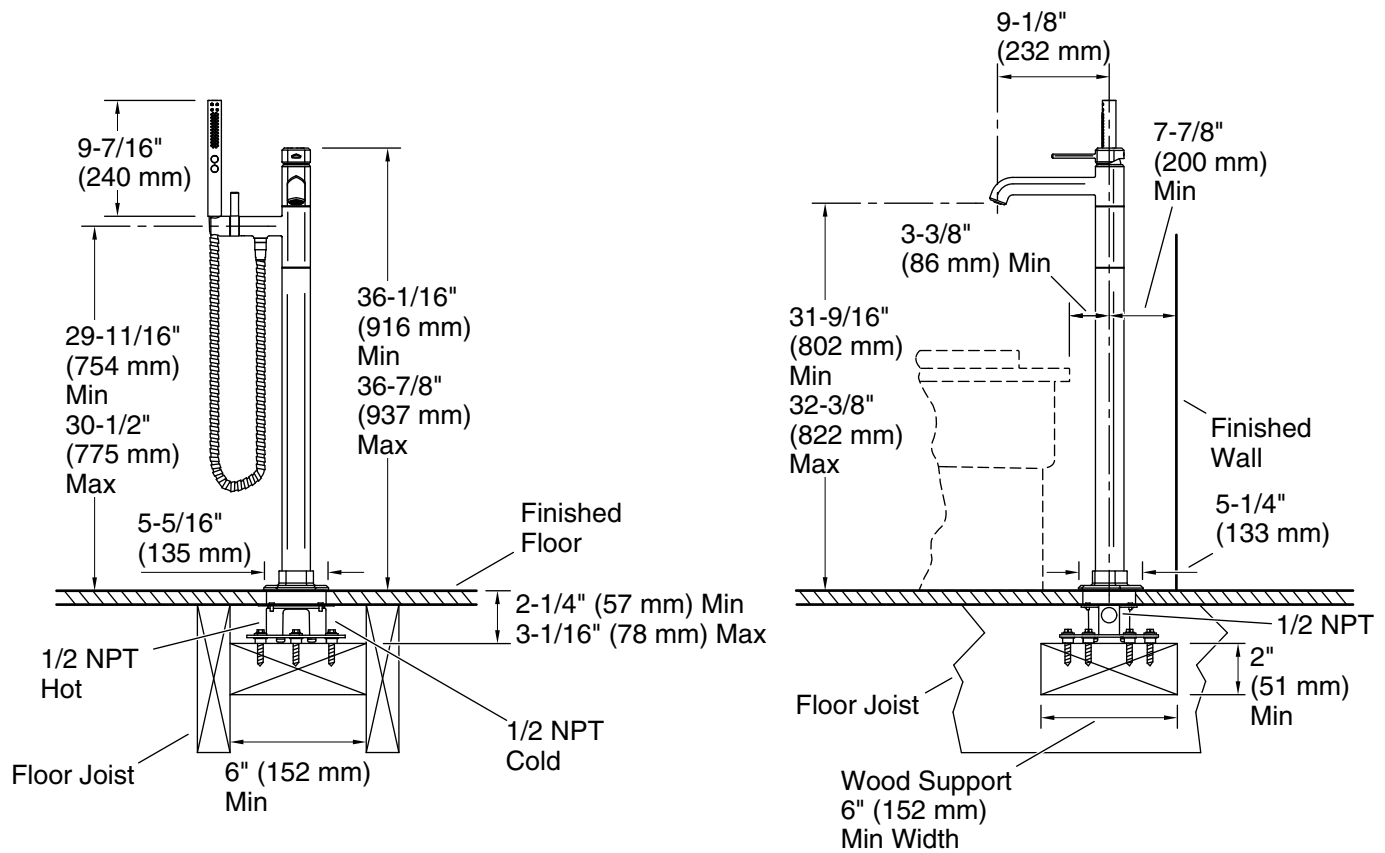EPA WaterSense™
California Energy Commission (CEC)

KOHLER® Faucet Lifetime Limited Warranty
See website for detailed warranty information.

Available Colors/Finishes
Color tiles intended for reference only.

Color	Code	Description
	CP	Polished Chrome
	SN	Vibrant™ Polished Nickel
	AF	Vibrant™ French Gold
	BN	Vibrant™ Brushed Nickel
	BV	Vibrant™ Brushed Bronze
	BL	Matte Black
	2MB	Vibrant™ Brushed Moderne Brass
	BMB	Matte Black with Moderne Brass

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
7-9-2023 06:54 - US/CA/LM/MX

THE BOLD LOOK OF KOHLER®

9-1/8"
(232 mm)

9-7/16"
(240 mm)

7-7/8"
(200 mm)
Min

3-3/8"
(86 mm) Min

36-1/16"
(916 mm)
Min
36-7/8"
(937 mm)
Max

29-11/16"
(754 mm)
Min
30-1/2"
(775 mm)
Max

31-9/16"
(802 mm)
Min
32-3/8"
(822 mm)
Max

Finished Wall

Finished Floor

5-5/16"
(135 mm)

5-1/4"
(133 mm)

2-1/4" (57 mm) Min
3-1/16" (78 mm) Max

1/2 NPT

1/2 NPT Hot

2"
(51 mm)
Min

1/2 NPT Cold

Floor Joist

Floor Joist

6" (152 mm) Min

Wood Support
6" (152 mm)
Min Width

Technical Information
All product dimensions are nominal.

Shower Valve:

Pressure:	45 psi (3.1 bar)
Maximum (Static) Pressure:	125 psi (8.6 bar)
Minimum (Operating) Pressure:	20 psi (1.4 bar)
Drain included:	No

1-800-4KOHLER (1-800-456-4537)
Kohler Co. reserves the right to make revisions without notice to product specifications.
For the most current Specification Sheet, go to www.kohler.com.
7-9-2023 06:54 - US/CA/LM/MX

THE BOLD LOOK OF KOHLER®