





HS521 Location:
Single-Mode Hand Shower with Slide Bar

Specification Submittal

Model Numbers	Feature Highlights
<input type="checkbox"/> HS521 Single-Mode HydroMersion® Hand Shower with Slide Bar	<ul style="list-style-type: none"> 4" square single-mode HydroMersion hand shower wand with Non-Positive Shutoff (NPSO). 30" slide bar with cradle for hand shower mounting. 60" flexible metal hose. Standard 2.0 gpm (7.6 L/min) flow restrictor. Shall be metal and nonmetal construction, plated in standard Polished Chrome finish.
Options/Modifications	
<input type="checkbox"/> 15  1.5 gpm (5.7 L/min) flow restrictor <input type="checkbox"/> BBZ Brushed Bronze finish <input type="checkbox"/> MB Matte Black finish <input type="checkbox"/> STN Satin Nickel finish	Warranty
Compliance	Limited Lifetime - for residential installations. 10 Years - for commercial/industrial installations. Refer to www.symmons.com/warranty for complete warranty information. 
- ASME A112.18.1/CSA B125.1 - Hand shower wand meets ADA requirements for operation.  	


SKU Builder

Series	Finish	Flow Rate	Final SKU
HS521		15	HS52115
HS521	MB		HS521MB

Architectural/Engineering Specification

Symmons Single-Mode Hand Shower with Slide Bar _____ Features 4" square single-mode HydroMersion hand shower wand with NPSO, 30" slide bar with cradle for hand shower mounting, 60" flexible metal hose, and standard 2.0 gpm (7.6 L/min) flow restrictor. Components shall be metal and nonmetal construction, plated in standard Polished Chrome finish. 10-Year Commercial Warranty. ASME A112.18.1/CSA B125.1 compliant. Hand shower wand meets ADA requirements for operation. Available options: 15 = 1.5 gpm (5.7 L/min) flow restrictor, BBZ = Brushed Bronze finish, MB = Matte Black finish, and STN = Satin Nickel finish.

Dimensions

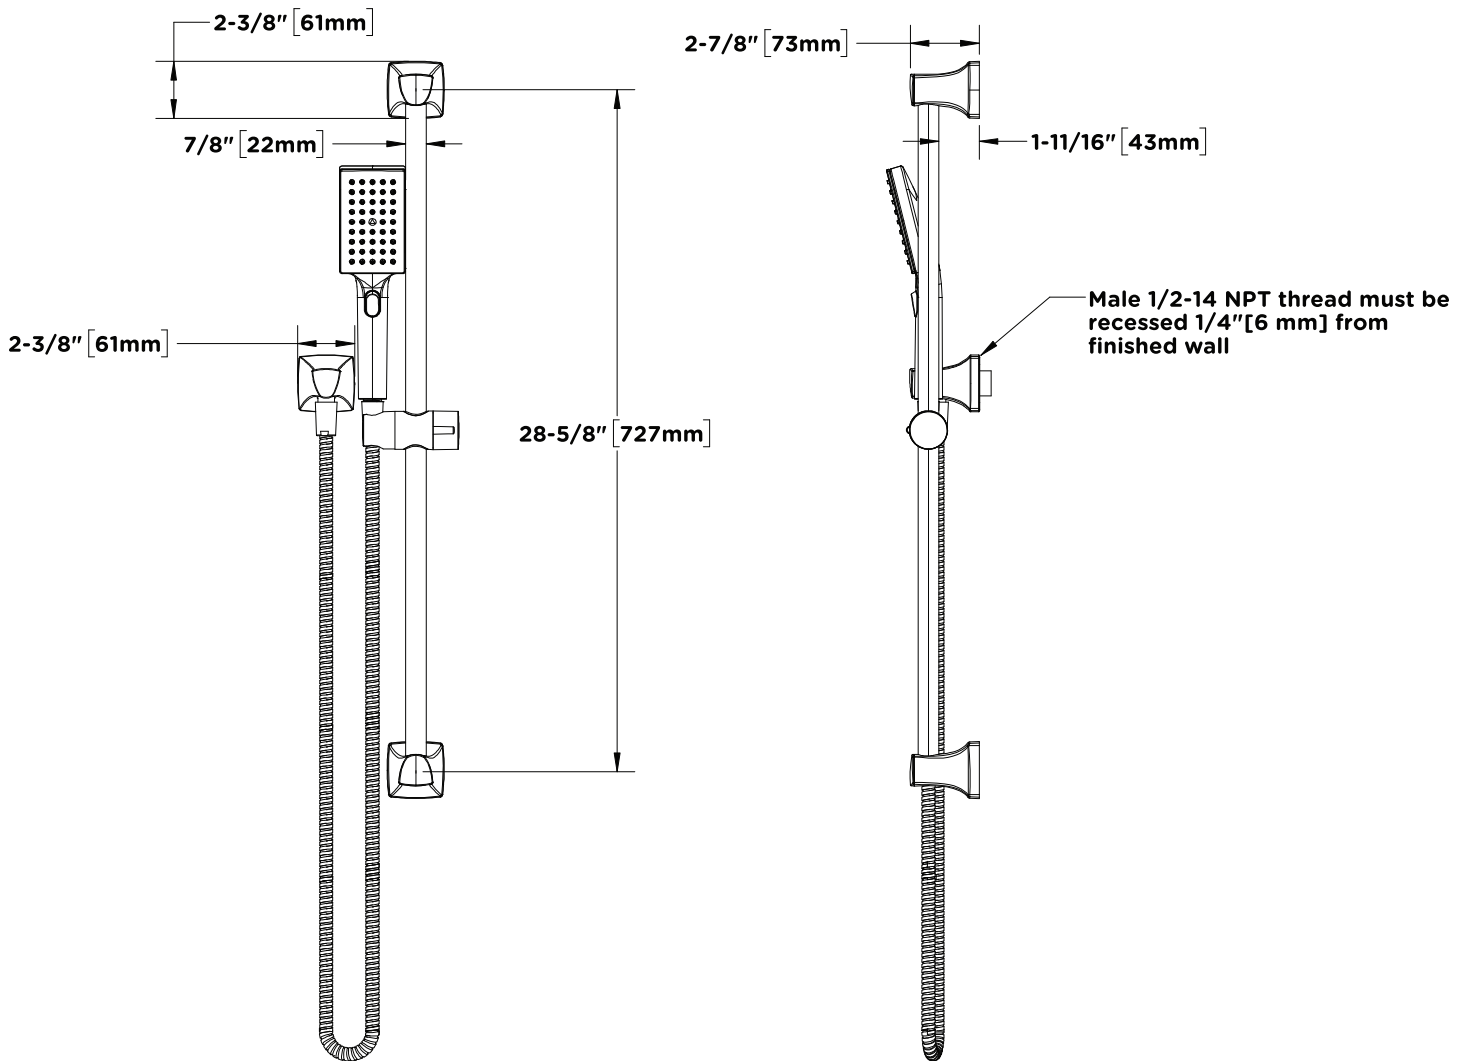

Note: Dimensions are subject to change without notice.