



# SUBMITTAL DATA SHEET

## Wall Mounted Heat Pump System

Location: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Submitted to: \_\_\_\_\_  
 Submitted by: \_\_\_\_\_  
 Reference: \_\_\_\_\_


Approval: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Construction: \_\_\_\_\_  
 Unit #: \_\_\_\_\_  
 Drawing #: \_\_\_\_\_

**Set Model**  
 Indoor unit model CCOXHAWM18HP

**Certified**





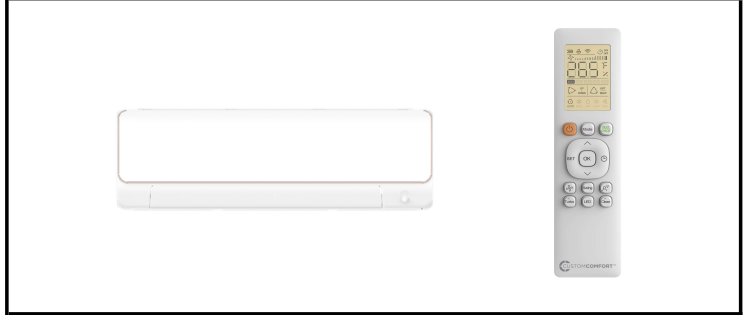

REFRIGERANT PIPE DATA		
Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Liquid side/ Gas side(indoor)	(inch)	1/4"/1/2"
Connection method		Flared

OPERATING RANGE		
Indoor(cooling)	(Deg. °F)	60~90
Indoor(heating)	(Deg. °F)	32~86

DIMENSIONS		
Dimension (WxDxH)	(inch)	40.06x9.72x12.60
Packing(WxDxH)	(inch)	43.11x12.80x15.75
Net/Gross weight	(lbs.)	27.12/35.71

INDOOR UNIT DATA			
<b>Indoor fan motor</b>			
Model			ZKFP-30-8-3-10
Qty			1
Input	(W)		36.00
Output	(W)		30.0
RLA	(A)		0.4
Speed(Hi/Mi/Lo)	(r/min)		1240/1024/916
<b>Air flow &amp; Noise level</b>			
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)		635.29/523.53/376.47/305.88
Indoor noise level (Hi/Med/Lo)	[dB(A)]		46/42/24
Dehumidification	(L/H)		2.16

## Indoor unit dimensions

