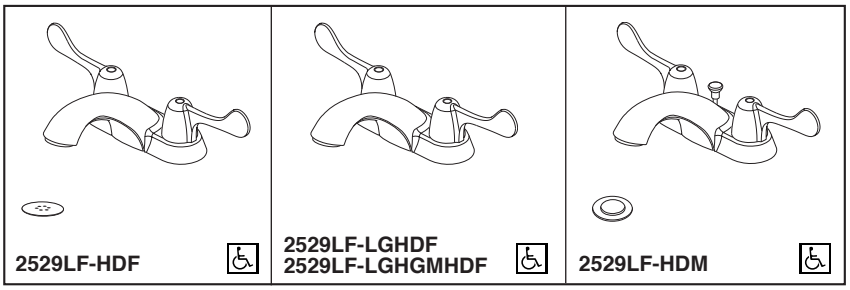

2529LF-HDF

2529LF-LGHDF
2529LF-LGHGMHDF

2529LF-HDM

Submitted Model No.:_____

Specific Features:_____

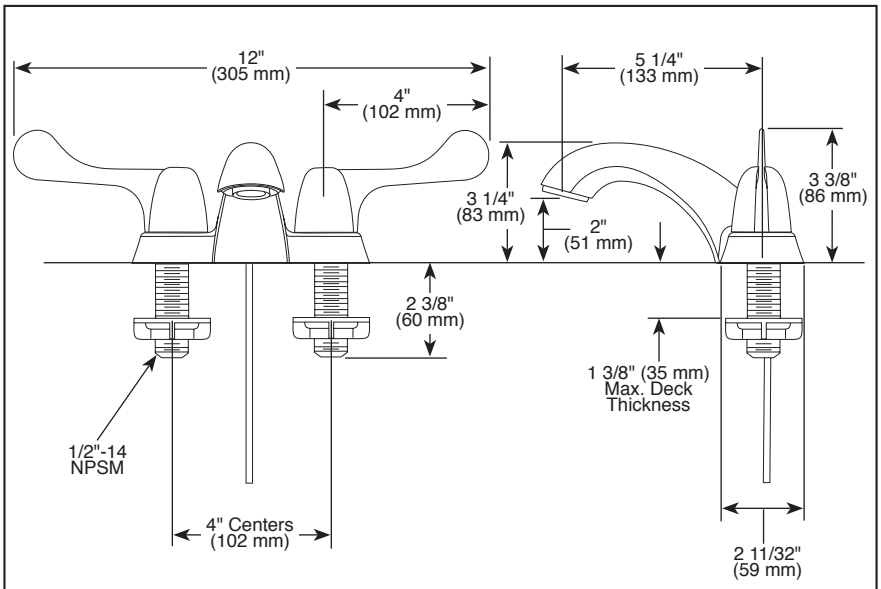

Metal Grid Strainer

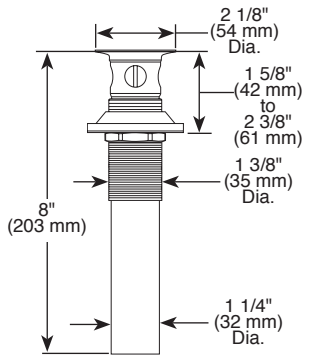

Metal Pop-Up

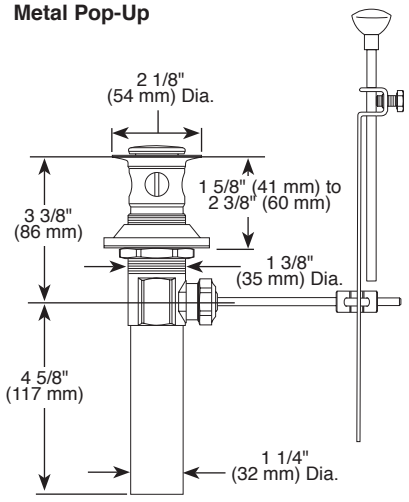

DELTA COMMERCIAL

LAVATORY FAUCETS

■ Two Handle Deck Mount

STANDARD SPECIFICATIONS:

- Max. 1.20 gpm @ 60 psi, 4.54 L/min @ 414 kPa
- HGM models only - max. 0.50 gpm @ 60 psi, 1.90 L/min @ 414 kPa
- Solid brass fabricated body
- Two and three hole mount
- Metal grid strainer (2529LF-HDF)
- Metal pop-up drain (2529LF-HDM)
- 1/4 turn handle stops
- Control mechanism is a rotating cylinder with stainless steel plate and 90˚ rotation, with replaceable non-metallic seats operating in stainless steel lined sockets
- Models containing "M" in suffix have metal drain with pop-up type fitting with plated flange and stopper
- 2529LF-LGHGMHDF equiped with vandal resistant .5 gpm spray outlet and wrench

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-2529LF-HDF Rev. C

DELTA FAUCET COMPANY

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2016 Masco Corporation of Indiana