



# Z5615-BWL

HET Elongated Wall Hung  
EcoVantage® Flush Valve Toilet System

TAG \_\_\_\_\_



## Z5615 Series Elongated

### Option:

- RF Retro-Fit Nut Kit for extending carrier studs from existing wall.

### Recommended Trim:

- Z5955SS-EL** Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.

### Recommended Carrier:

- Z1201 or Z1202 EZCarry™** 500 lbs load rated High Efficiency Carrier

*Note: To ensure system performance:  
Minimum Running Water Pressure = 25 psi*



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

*These dimensions and specifications are subject to change without notice.  
Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.  
Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed per code.*

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION  
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330  
PHONE: 1-800-997-3876 ♦ FAX: 919-775-3541  
WWW.ZURN.COM  
IN CANADA: ZURN INDUSTRIES LIMITED  
7900 GOREWAY DRIVE UNIT 10 ♦ BRAMPTON, ONTARIO L6T5W6  
PHONE: 905-405-8272 FAX: 905-405-1292



## Z5615 HET Series

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards, while using as little as 1.1 gallons of water per flush.
- Universal high efficiency toilet can be specified with 1.1 gpf [4.2Lpf], 1.28 gpf [4.8Lpf], 1.6 gpf [6.0 Lpf] or dual flush valves.
- Vitreous china
- Elongated front rim
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Shipping Weight: 40 lbs.
- System MaP score of 1,000 grams at 1.28 gpf with Zurn Flush Valve
- Static weight load of 1,000 lbs\*

## Engineering Specification

### Z5615-BWL

#### EcoVantage High Efficiency Toilet System

- Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency wall hung toilet with siphon jet flushing action and elongated front rim with 1-1/2" top spud. Universal high efficiency toilet is designed to exceed industry standards with flush volumes of 1.1 gallons per flush or higher.

Replaces Zurn Z5610

### Z5616-BWL


#### EcoVantage High Efficiency Toilet System

- Vitreous China, 1.1 gpf [4.2 Lpf] or greater high efficiency wall hung toilet with siphon jet flushing action and elongated front rim with integral bedpan lugs, antimicrobial ceramic glaze, and 1-1/2" top spud. Universal high efficiency toilet is designed to exceed industry standards with flush volumes of 1.1 gallons per flush or higher.

Replaces Zurn Z5611

\*Not intended for bariatric use

See Zurn One Systems for suggested packages.

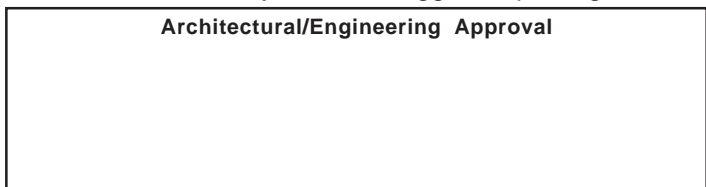




# Z5615-BWL

HET Elongated Wall Hung  
EcoVantage® Flush Valve Toilet System

TAG \_\_\_\_\_

Rough-in dimensions for Z5615 Series

- Z5615-BWL with top spud, shown with Z6000AV manual valve

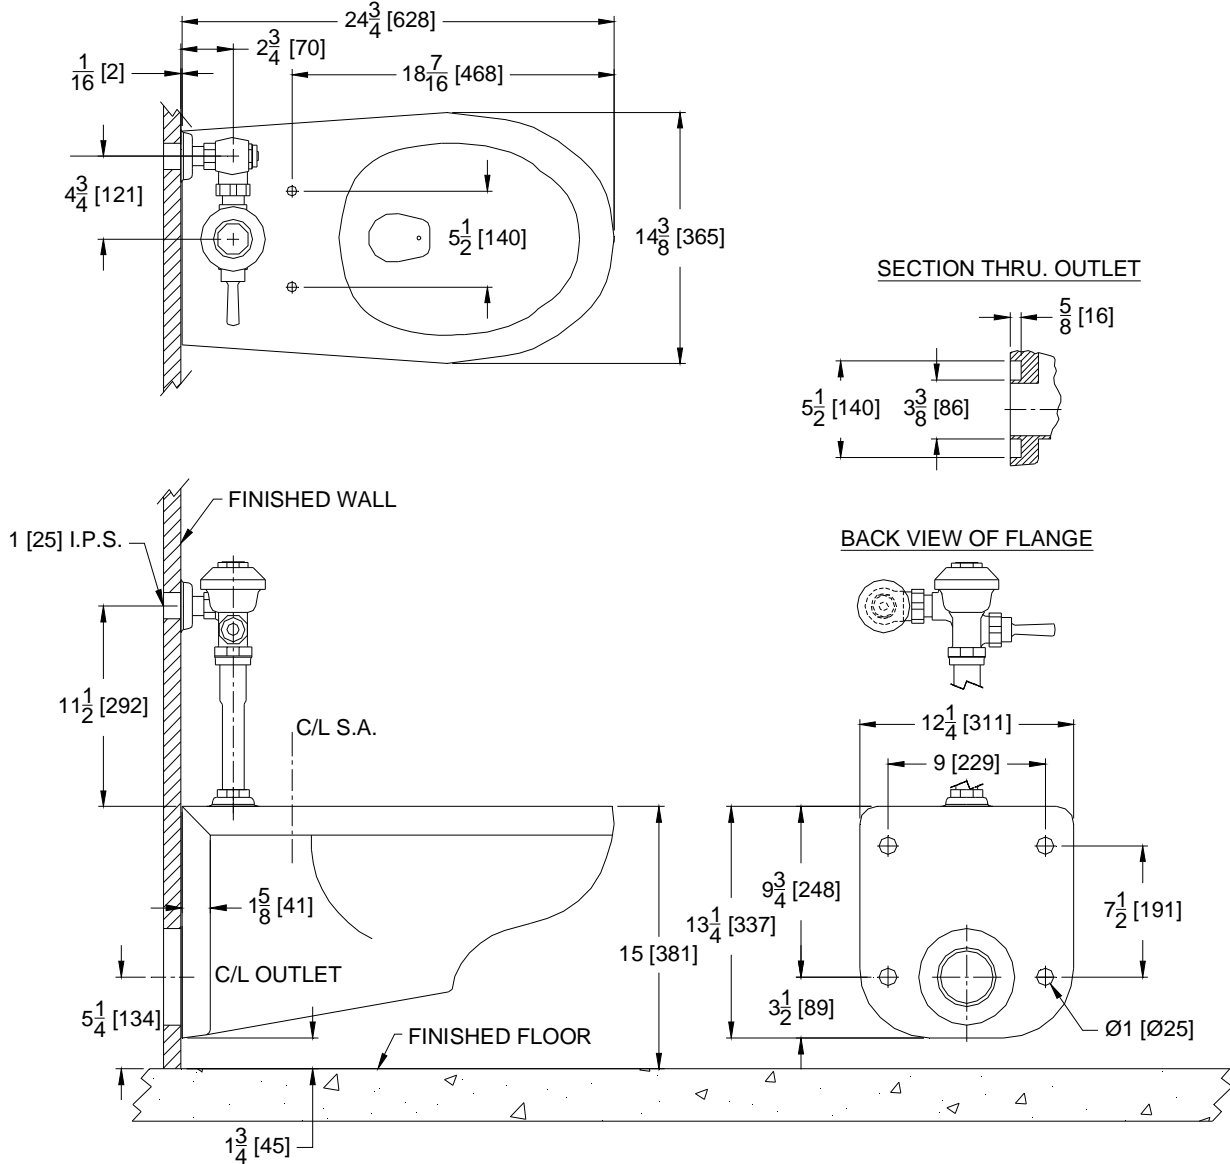

These dimensions and specifications are subject to change without notice.

Fixture dimensions meet ANSI/ASME standard A112.19.2 and CAN/CSA B45 requirements.

Meets the American Disabilities Guidelines and ANSI A117.1 requirements when installed per code.



ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION  
5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330  
PHONE: 1-800-997-3876 ♦ FAX: 919-775-3541  
WWW.ZURN.COM

IN CANADA: ZURN INDUSTRIES LIMITED  
7900 GOREWAY DRIVE UNIT 10 ♦ BRAMPTON, ONTARIO L6T5W6  
PHONE: 905-405-8272 FAX: 905-405-1292

**Note:** For ADA compliance, rim height should be installed 17" from finished floor.