




High Head Saber Screws

High Head Saber Screw vs. standard screw

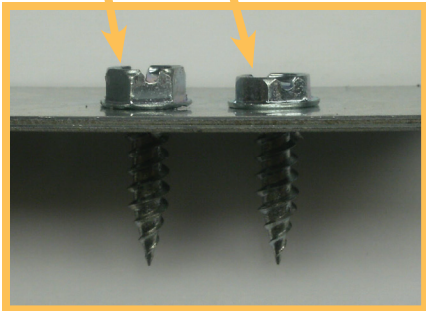

Slotted for easy removal with standard flat driver.

Higher head stays in chuck with ease and provides stability during insertion.

Serrated Edge to prevent the backing out of the screw.

Thread is designed to pull the screw through steel with no strip-out.

Heavy zinc-plating for strong corrosion resistance.

Pierces through heavier gauges of steel.

No metal filings to clog drill chuck.

Super sharp, specially hardened, non-walking point.

Precision formed point for constant performance.

ITEM SIZE	DRIVER SIZE	MAX. PIERCING CAPABILITY	HUNDRED PACK (SAC)	TWO-FIFTY PACK (SAQ)	FIVE HUNDRED PACK (SAF)	THOUSAND PACK (SAT)	BUCKET PACK (SAP)		BULK PACK (SAB)		2 GALLON PAIL (BKSAB)	
			ITEM#	ITEM#	ITEM#	ITEM#	ITEM#	QTY.	ITEM#	QTY.	ITEM#	QTY.
8HH x 1/2	1/4	.044 in	14240	14245	14250	14255	15098	5 TH	15103	14 TH	N/A	N/A
8HH x 3/4	1/4	.044 in	14241	14246	14251	14256	15099	4 TH	15104	10 TH	N/A	N/A
8HH x 1	1/4	.044 in	14242	14247	14252	15257	15100	3 TH	15105	7 TH	N/A	N/A
8HH x 1-1/2	1/4	.044 in	14243	14248	14253	14258	15101	3 TH	15106	4 TH	N/A	N/A
8HH x 2	1/4	.044 in	14244	14249	14254	14259	15102	3 TH	15107	3 TH	N/A	N/A
10HH x 3/4	1/4	.044 in	14236	14237	14238	14239	15119	3 TH	15120	5 TH	15036	5 TH

Duro Dyne East Division, Bay Shore, NY 631-249-9000 Fax: 631-249-8346
 Duro Dyne Midwest Division, Fairfield, OH 513-870-6000 Fax: 513-870-6005
 Duro Dyne West Division, Fontana, CA 562-926-1774 Fax: 562-926-5778
 Duro Dyne Canada, Lachine, Quebec, Canada 514-422-9760 Fax: 514-636-0328
www.durodyne.com E-mail: durodyne@durodyne.com

