

**Features**

- Framed
- 3/16" glass
- ComforTrack technology
- Exterior towel bar
- Out-of-plumb adjustability
- Tempered glass ensures maximum safety and durability
- Anodized aluminum prevents rusting or corrosion

**Installation**

- Not for use in hospitality.
- For residential use only.

**Included Components**

Additional Components:  
Hardware kit



**Codes/Standards**

ANSI Z97.1  
CPSC 16CFR 1201

**STERLING® Warranty - Bath and Shower Doors**


See website for detailed warranty information.

**Available Colors/Finishes**

*Color tiles intended for reference only.*


**Color Code Description**

ADR  
N  
S

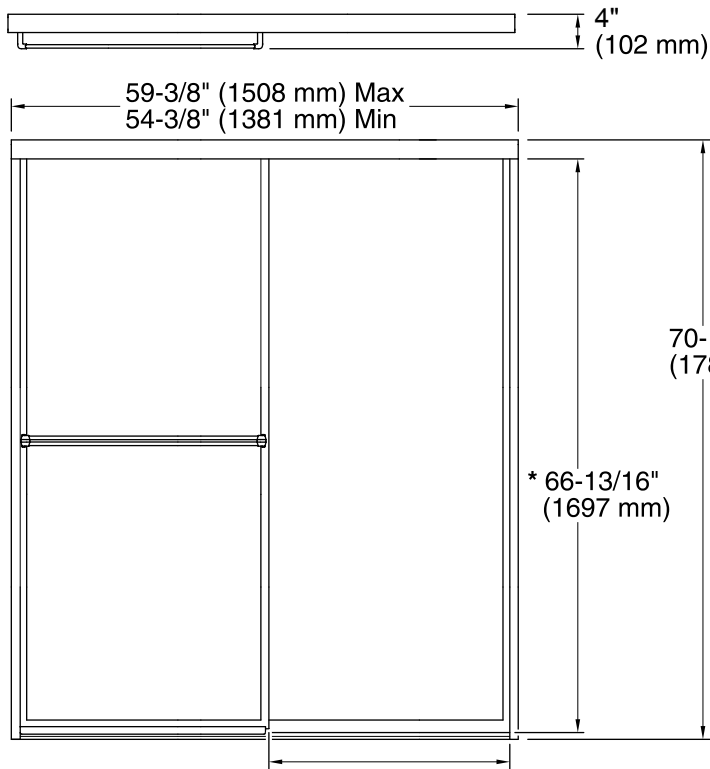

\* 28-3/16" (716 mm) Max  
\* 25-11/16" (652 mm) Min

**\* Walk-Through**

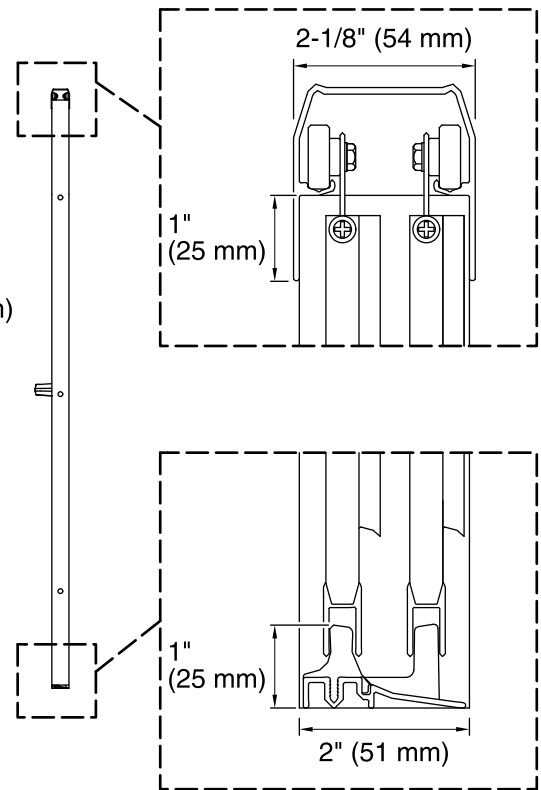

**Notes**

Install this product according to the installation guide.

**Technical Information**

All product dimensions are nominal.

Installation type: For shower base installation

Opening style: Sliding/Bypass

Opening Width - Min: 54-3/8" (1381 mm)

Opening Width - Max: 59-3/8" (1508 mm)

Walk-through - Min: 25-11/16" (652 mm)

Walk-through - Max: 28-3/16" (716 mm)

Glass thickness: 3/16" (5 mm)