

SUBMITTAL SHEET

JOB NAME		ITEM TAG
JOB LOCATION		PART NUMBER
CONTRACTOR	DATE	
ENGINEER APPROVAL	DATE	

ANTI-SWEAT TOILET TANK VALVES

Model T-20 / T-20A

180°F maximum service temp

Model T-20 is factory set at 30% hot, 70% cold mix

Model T-20a adjustable down from 30% hot to 0% (100% cold)

All connections are combination 1/2" mip or 1/2" solder

Compression nuts and ferrules are available

Working Pressure, Non Shock (PSI)

Cold working pressure (CWP): 125 CWP

Saturated steam (WSP): N/A




**Pictured
Model T-20A**

MATERIAL SPECIFICATION

PART	MATERIAL	SPECIFICATIONS
1 Body	Bronze	B584 C84400
2 Cold plug	Brass	B16 C36000
3 Hot plug	Brass	B16 C36000
4 Spring	304 Stainless steel	
5 Regulating cartridge	Brass	B16 C36000
6 Adjustment screw	Brass	B16 C36000
7 Plug o-rings (2)	NBR (BUNA-N) rubber	FN 80
8 Cartridge o-rings (2)	NBR (BUNA-N) rubber	FN 80
9 Adjustment screw o-ring	NBR (BUNA-N) rubber	FN 80

DIMENSIONS

Size	A	B
T-20	2.99	2.72
T-20A	2.99	2.72

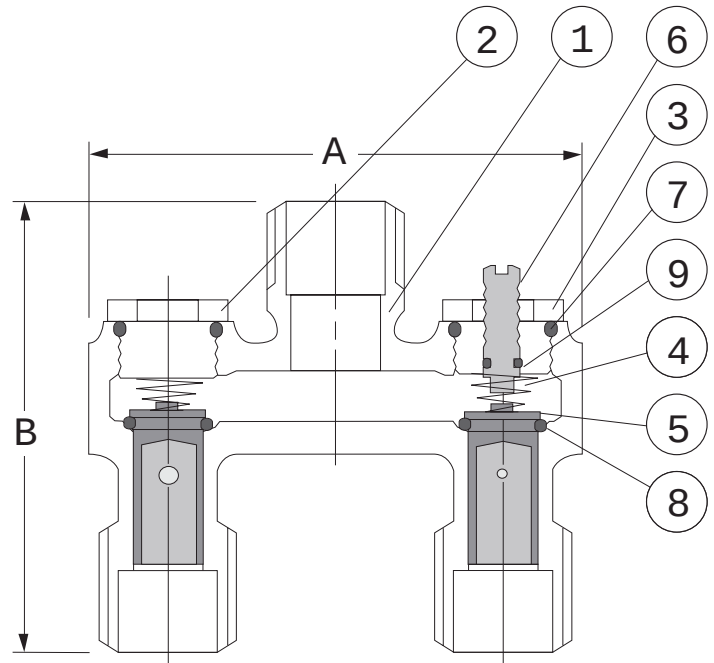

**Pictured
Model T-20A
Cut-away**