

Artifacts® Deck-Mount Bridge Secondary Sink Faucet K-76520-4

Features

- Matching two-function sidespray featuring Sweep[®] Spray and BerrySoft[®] provides convenience for cleaning and food prep.
- Sweep[®] spray creates a wide, forceful blade of water for superior cleaning.
- BerrySoft[®] is a light spray ideal for washing hands, rinsing delicate dishware and prepping fruits and vegetables.
- Ceramic disc valves exceed industry longevity standards, ensuring durable performance for life.
- ProMotion[®] technology's light, quiet braided hose and swiveling ball joint make the sidespray easier and more comfortable to use.
- MasterClean[™] sprayface features an easy-to-clean surface that withstands mineral buildup.
- Two lever handles offer separate control of hot and cold water.
- 1.5 gpm (5.7 lpm) maximum flow rate at 60 psi (4.14 bar).

Material

- Premium metal construction for durability and reliability.
- KOHLER finishes resist corrosion and tarnishing.

Installation

• Three-hole or four-hole installation.

Recommended Products/Accessories

K-77685 Single-Cartridge Water Filtration System K-77686 Double-Cartridge Water Filtration System K-77687 single replacement filter cartridge K-77688 Replacement Filter Cartridges, Two-Pack K-23723 Faucet cleaner



ADA CSA B651

Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI 61 NSF/ANSI 372 All applicable US Federal and State material regulations DOE - Energy Policy Act 1992 California Energy Commission (CEC) ADA ICC/ANSI A117.1 CSA B651

KOHLER[®] Faucet Lifetime Limited Warranty

See website for detailed warranty information.

Available Colors/Finishes

Color tiles intended for reference only.

Color Code Description


СР	Polished Chrome
SN	Vibrant® Polished Nickel
VS	Vibrant® Stainless
2BZ	Oil-Rubbed Bronze



Artifacts®

KOHLER. Faucets

Deck-Mount Bridge Secondary Sink Faucet K-76520-4

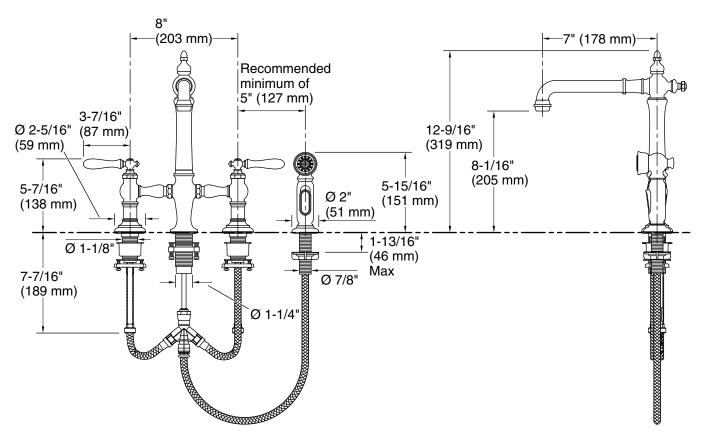

Technical Information

All product dimensions are nominal.

Faucet:

Flow rate:1.5 gal/min (5.7 l/min)Pressure:60 psi (4.1 bar)

Sidespray:

Flow rate:1.8 gal/min (6.8 l/min)Pressure:60 psi (4.1 bar)

Spout:

Spout reach:

7" (178 mm)

Notes

Install this product according to the installation guide.

Drill the hole for the sidespray a minimum of 5" (127 mm) from the center of the lever handle. ADA, CSA B651 compliant when installed to the specific requirements of these regulations.

