



Outlet Kits (1 Outlet)

Part No.	Duct		Plenum
	Dia	R-factor	
UPC-80F-1	2.0 (50)	R-3.3	Fiberglass ductboard, 1" (25)
UPC-80FR6-1	2.0 (50)	R-6.0	Fiberglass ductboard, 1.5" (38)
UPC-80M-1	2.0 (50)	R-3.2	Metal duct, round
UPC-80MR6-1	2.0 (50)	R-6.0	Metal duct, round
UPC-80MF-1	2.0 (50)	R-3.3	Metal duct, rectangular
UPC-280M-1	2.5 (63)	R-3.3	Metal duct, round
UPC-280MR6-1	2.5 (63)	R-6.0	Metal duct, round



1 — 12 ft. (3660 mm) Sound Attenuator



1 — Supply Outlet (White)



2 — Sound attenuator Clamps
2 — Supply Tubing Clamps



2 — Toggles and Screws



1 — Winter Supply Shutoff



1 — Coupling with Tape Rings



1 — Balancing Orifice Kit for one outlet
UPC-80 includes cap and two disks UPC-280 is one piece



UPC-80F only
1 — Spin-In Take-off for Fiberglass ductboard




UPC-80M, UPC-280M only
1 — Metal Take-off with gasket and tape ring

Installation Kits (Outlets, no duct)

Part No.	Qty	Duct		Plenum
		Dia	R-factor	
UPC-89F-6	6	2.0 (50)		Fiberglass ductboard, 1" (25)
UPC-89F-8	8	2.0 (50)		Fiberglass ductboard, 1" (25)
UPC-80FR6-6	6	2.0 (50)		Fiberglass ductboard, 1.5" (38)
UPC-89M-6	6	2.0 (50)		Metal duct, round
UPC-89M-8	8	2.0 (50)		Metal duct, round
UPC-89MF-6	6	2.0 (50)		Metal duct, rectangular
UPC-89MF-8	8	2.0 (50)		Metal duct, rectangular
UPC-289M-5	5	2.5 (63)		Metal duct, round
UPC-289MF-5	5	2.5 (63)		Metal duct, rectangular

*For quantities of each part, see the above table.



*Qty — Supply Outlets (White)



*Qty x 2 — Sound attenuator Clamps
*Qty x 2 — Supply Tubing Clamps



*Qty x 2 — Toggles and Screws



*Qty — Winter Supply Shutoffs




*Qty — Couplings with Tape Rings



1 — Balancing Orifice Kit for one outlet
UPC-80 includes cap and two disks UPC-280 is one piece




UPC-89F only
*Qty — Spin-In Take-off for Fiberglass ductboard




UPC-89M, UPC-280M only
*Qty — Metal Take-offs with gasket and tape ring

Outlet Kits, Short (5 Outlets)

- UPC-84-5 Outlet Kit for 1-inch Fiberglass Plenum
- UPC-85-5 Outlet Kit for Metal Plenum



5 — 12" (300 mm) Rigid Attenuators



5 — Supply Outlets (White)



5 — Winter Supply Shutoffs



10 — Toggles and Screws




UPC-84-5 only
5 — Fiberglass Spin-In Take-offs




UPC-85-5 only
5 — Metal Take-offs with gasket and tape ring

Mounting Rails, M1218

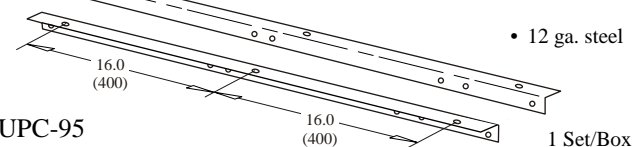

Secondary Drain Pan

- 3/4-inch (19 mm) Female PVC Socket Connection



P/N	Used On	No. of Modules	Overall Dimensions A x B	
UPC-94	1218	-	24.0 x 42.0	(610 x 1067)
UPC-20B	2430	2	29.0 x 31.5	(737 x 800)
UPC-20C	2430	3	29.0 x 43.75	(737 x 1110)
UPC-27B	3036	2	34.0 x 31.5	(864 x 800)
UPC-27C	3036	3	34.0 x 43.75	(864 x 1110)
UPC-24B	3642	2	42.0 x 31.5	(1067 x 800)
UPC-24C	3642	3	42.0 x 43.75	(1067 x 1110)
"	4860	2	"	"
UPC-24D	4860	3	42.0 x 54.0	(1067 x 1372)