


Features:

- *Lead Free
- 400 WOG
- cUPC Approved
- NSF/ANSI 61 & 372 Certified
- Full Port Two-piece Ball Valve
- Cold Expansion PEX end Comply to ASTM F-1960
- Minimum Temperature (Water): 32 °F
- Maximum Temperature (Water): 200 °F
- Blow-out Proof Stem
- Rust Resistant Handle With Vinyl Grip
- Not for Use at or Below Ground Level



Dimensions & Materials List:

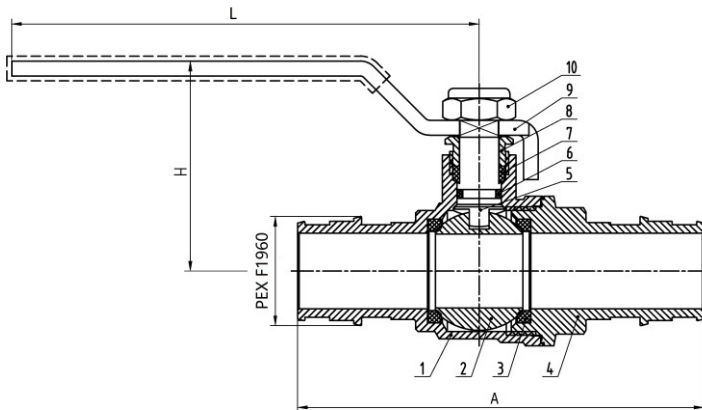

No.	Part	QTY	Material
1	Body	1	Lead Free Brass
2	Ball	1	Lead Free Brass
3	Seat	2	PTFE
4	Bonnet	1	Lead Free Brass
5	Stem	1	Brass
6	O-Ring	1	NBR
7	Packing	1	PTFE
8	Packing Nut	1	Brass
9	Handle	1	Zinc Plated Steel
10	Lock Nut	1	Stainless Steel

All dimensions in inches

Part#	Description	Size	Dimensions		
			A	H	L
4PRO12LFPEXBV	1/2" LF F1960 Cold Expansion PEX Ball Valve	1/2"	2.634	1.516	3.150
4PRO34LFPEXBV	3/4" LF F1960 Cold Expansion PEX Ball Valve	3/4"	3.252	1.673	3.740
4PRO1LFPEXBV	1" LF F1960 Cold Expansion PEX Ball Valve	1"	3.945	1.929	3.937

*Lead Free: weighted average lead content $\leq 0.25\%$