

Smatrix Pulse digital thermostats

Project information

|                                |                 |
|--------------------------------|-----------------|
| Job name:                      | Location:       |
| Engineer:                      | Date submitted: |
| Contractor:                    | Submitted by:   |
| Manufacturer's representative: | Approved by:    |


Technical data

|                                         |             |
|-----------------------------------------|-------------|
| Operating temperature min. [°F]         | 32 °f       |
| Operating temperature max. [°F]         | 113 °f      |
| Ambient temperature min. [F]            | 14 °f       |
| Ambient temperature max. [F]            | 149 °f      |
| Ambient humidity non-condensing max [%] | 85          |
| Type of battery                         | CR2032 / 3V |
| Prop 65 label required?                 | Yes         |

Product information and application use

Smatrix Pulse provides precise wireless control of radiant floor heating as well as forced-air heating and cooling systems in one solution that connects to a smart home assistant and can also be controlled remotely via the Smatrix Pulse App.

The Smatrix Pulse Digital Thermostat (T-169) is an operative temperature sensor that provides precise measurement of thermal comfort. The thermostat shows the current room temperature, set temperature, or relative humidity on the display. The user adjusts temperature settings via the buttons on the side of the thermostat. The thermostat connects via wireless technology to the Smatrix Pulse Controller (X-265), which can connect up to six (6) thermostats and eight (8) actuators. The controller operates the actuators, which, in turn, affect the flow of the supply water to change the indoor temperature using information transmitted from the registered thermostats and system parameters.

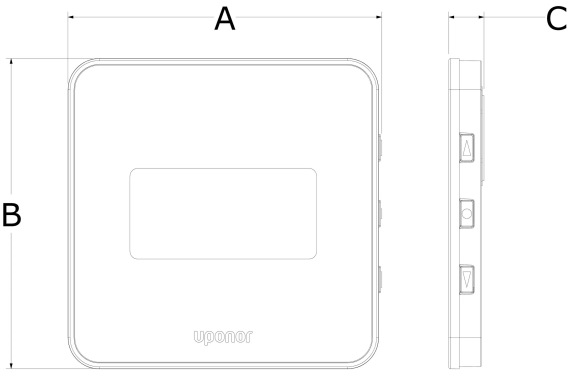

| Part name                                | Part no. | A [mm] | B [mm] | C [mm] | Weight per UOM [kg/UOM] |
|------------------------------------------|----------|--------|--------|--------|-------------------------|
| Smatrix Pulse Digital Thermostat (T-169) | A3800169 | 81     | 80     | 9      | 0.045                   |

| Part name                         | Part no. | Codes | Standards                                 | Listings                         |
|-----------------------------------|----------|-------|-------------------------------------------|----------------------------------|
| Smatrix Pulse digital thermostats | A3800169 | -     | IC RSS-210 ICC RSS-Gen FCC 47 CFR Part 15 | IC 7664A-SM4NA0 FCC ID V9MSM4NA0 |

Installation

Related applications

Refer to the Smatrix Pulse Installation and Operation Manual for installation information.

- Radiant
- Hydronic Heating & Cooling
- Tools & Accessories

Footnotes

Contact information

|   |                                                                                                     |                                                                                                 |
|---|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| - | Uponor Inc.<br>5925 148th Street West<br>Apple Valley, MN 55124<br>T 800.321.4739<br>F 952.891.2008 | Uponor Ltd.<br>6510 Kennedy Road<br>Mississauga, ON L5T 2X4<br>T 888.594.7726<br>F 800.638.9517 |
|---|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|