

# KITCHEN SUPPLY OUTLET BOX

»» 696 SERIES

OxBox™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief 696 series supply OxBox™ shall be used where necessary in residential or commercial plumbing supply systems. Access box can be secured directly to vertical stud or between studs using galvanized bracket. Supply line(s) can be installed from above or below. Unit shall be available with plated, ¼-turn valves. Metal support bracket shall install into top/bottom tracks of box. Outlet connections should generally be provided with a test/tamper-resistant cap. Every unit shall include a debris cover for protection during rough-in.

## MATERIALS

**Valve body:** no-lead brass<sup>1</sup>  
**Valve shank:** no-lead brass<sup>1</sup>/PPSU/CPVC, 304SS grip ring  
**Outlet box/frame/arrester clip:** ABS  
**Arrester body:** stainless steel, C69300 NL brass<sup>1</sup>  
**Arrester piston:** GFPP with EPDM o-rings  
**Bracket:** galvanized steel

## CERTIFICATIONS/APPROVALS

NSF-372 compliant, IAPMO listed box and valves  
 Valves meet ASME A112.18.1, ASSE 1010 Arresters

## VALVE/ARRESTER WORKING LIMITS

**Max working temperature:** 200°F  
**Max air/water testing & working pressure:** 150 PSIG

## DIMENSIONS

<b>A:</b> Frame width*	5¾"
<b>B:</b> Frame height*	7¼"
<b>C:</b> Frame opening width	3⅝"
<b>D:</b> Frame opening height	5⅞"
<b>E:</b> Rough-in box width	4"
<b>F:</b> Rough-in box depth	3½"
<b>G:</b> Rough-in box height	5½"
<b>H:</b> Supply connections	½" nominal, 2" O.C.
<b>I:</b> Outlet connections	¼", ⅜" compression
<b>J:</b> Bracket length	18"


\*Frame sold separately: 696-1F



696-G3011WR



696-G4021WR

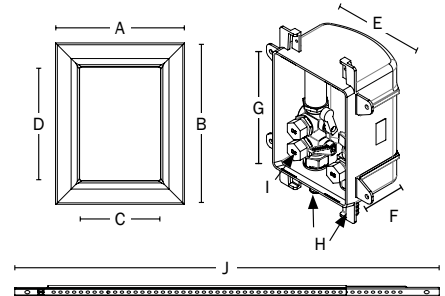

## Create Item Number

### 696-GABCD

e.g. **696-G4024WR:** Kitchen supply outlet box with TWO ⅜" Hot Outlets, Hot-Side Arrester - ONE ⅜" Cold Outlet and ONE ¼" Cold Outlet, Cold-Side Arrester - F1960 PEX connection

#### SUPPLY OUTLET NUMBER A

**30** = 3 outlets  
**40** = 4 outlets

#### ARRESTER B

**1** = Single arrester - for HOT side  
**2** = Dual arresters - for HOT/COLD side

#### SUPPLY OUTLET SIZE C

**1** = All (3 or 4) outlets ⅜" comp.  
**4** = ⅜" outlets with one ¼" outlet\*

#### SUPPLY CONNECTION D

**CR** = ½" Male CPVC  
**MR** = ½" MIP/F.SWT  
**PR** = ½" Male sweat/press/push  
**VR** = ½" Viega® PureFlow® PEX  
**WR** = ½" PEX F1960 Grip™  
**XR** = ½" PEX F1807/F2159 Crimp™

Available Separately:

696-1F: Frame only  
 697-1F: Stainless steel frame only  
 696-SC1: Frame insert w/hose knockout  
 696-EX: Frame extension

<sup>1</sup>C69300 material is DZR and SCC resistant, compliant with NSF-61 & 372, and compliant with California No Lead Plumbing Law

\*¼" outlet is on cold side