



LP Dielectric Union

Brass MIP x Flare, 250 PSI

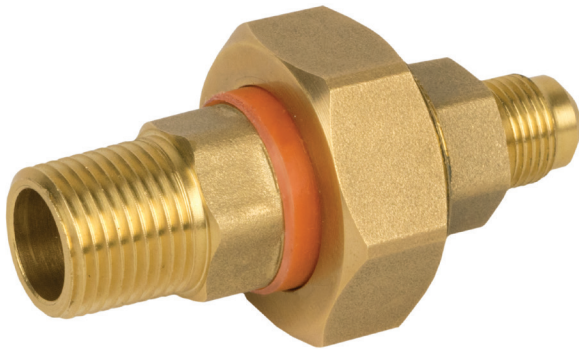

Brass MIP x Flare

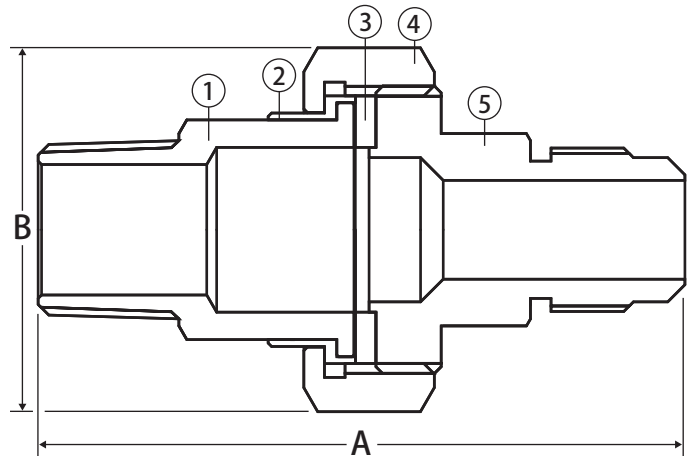

Features

- Meets the NFPA 58 dielectric requirement
- Prevents accelerated corrosion
- -40° F to 180° F - HNBR Seal

Approvals

- ANSI B1.20.1
- Flare Connection in accordance with NFPA 54/ANSI Z223.1

Material Specifications

No.	Part	Materials
1	Tail Piece	Brass - 37700
2	O-ring	PE Plastic
3	Gasket	HNBR
4	Nut	Brass - 37700
5	Body	Brass - 37700

Dimensions

Part No.	Size	A	B
703-102	1/2" MIP x 3/8" FL	3.17	1.77
703-103	1/2" MIP x 1/2" FL	3.42	1.77
703-104	1/2" MIP x 5/8" FL	3.54	1.77
704-102	3/4" MIP x 3/8" FL	3.55	2.09
704-103	3/4" MIP x 1/2" FL	3.69	2.09
704-104	3/4" MIP x 5/8" FL	3.88	2.09