

SPECIFICATIONS

1. Molded polyethylene body
2. EPDM gaskets
3. Powder coated steel ring
4. Unit weight: 13 lbs


ENGINEER SPECIFICATION GUIDE

TeleGlide field adjustable riser system to consist of rotationally molded polyethylene body, EPDM gasket and powder coated steel ring. Risers shall allow onsite adjustability of cover to grade.


INSTALLATION NOTE

Minimum install height - 2-1/8". Maximum install height - 16-0".

Do not stack risers. Maximum of one riser per base unit. Access to internal components will be compromised. If deeper invert required, install larger unit with 24" cover.

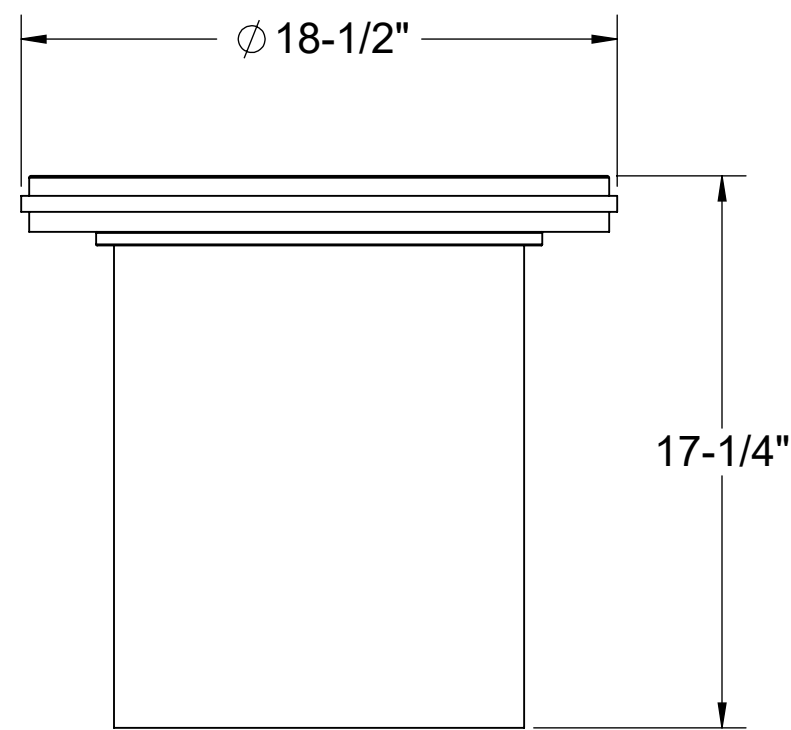

SHORT RISER (SR-16)

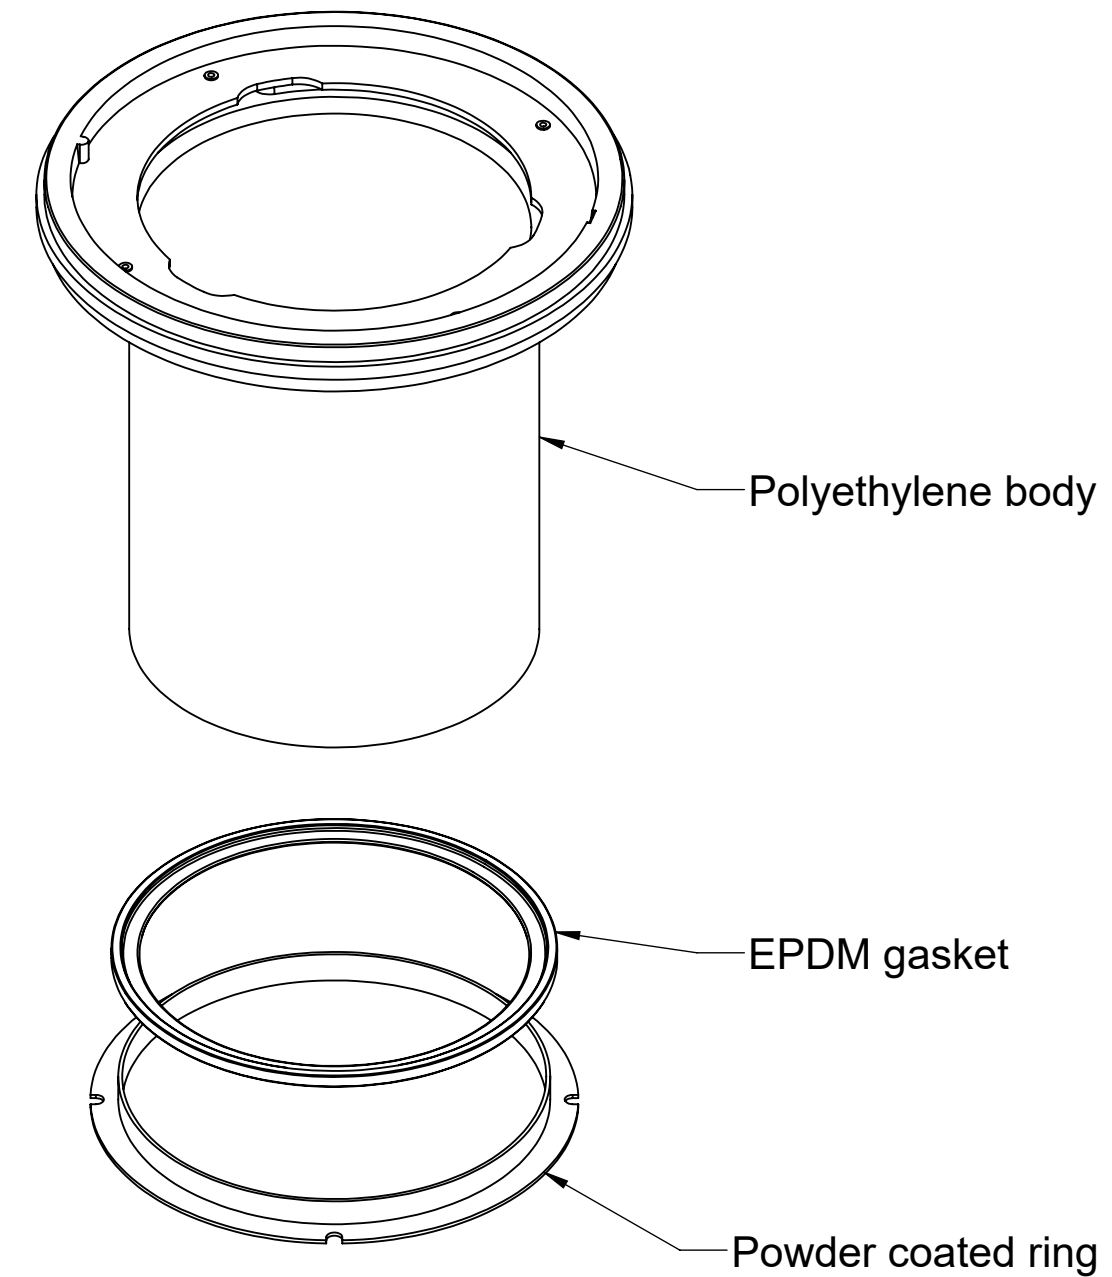

SHORT RISER (SR-16)

MODEL NUMBER: SR-16

DESCRIPTION:
RISER EXTENSION SYSTEM
COMPONENT SPECIFICATIONS

SPECIFICATION SHEET

Striem
3100 Brinkerhoff
Kansas City, KS 66115
Tel: 913-222-1500
Fax: 913-291-0457
www.striemco.com



Made in the U.S.A

DWG BY: MJ **DATE:** 02/13/19 **REV:** **ECO:**

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STRIEM, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STRIEM, LLC IS PROHIBITED.