



The New

Tigerloop®

ULTRA™

The economical Tigerloop®/Spin-On filter combination that's fast and easy to install. Costs less than installing a Tigerloop® and Spin-On separately! Designed specifically for the demands of American heating systems.

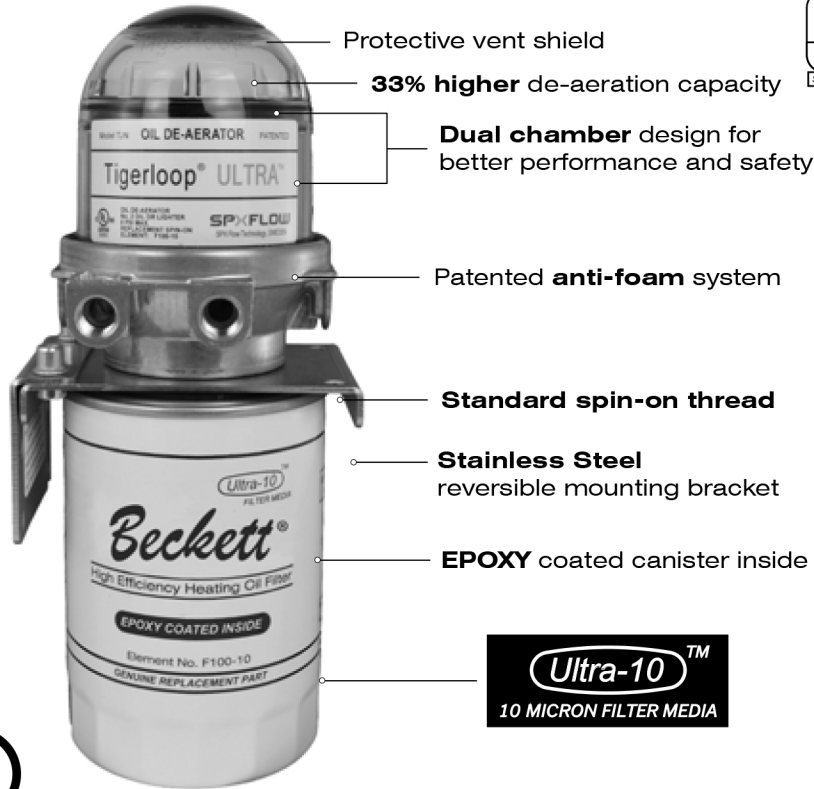

Protective vent shield

33% higher de-aeration capacity

Dual chamber design for better performance and safety

Patented **anti-foam** system

Standard spin-on thread

Stainless Steel reversible mounting bracket

EPOXY coated canister inside



Costs less than installing a Tigerloop® and Spin-On separately!

Technical Information

MAX. NOZZLE CAPACITY 29.0 GPH
 MAX. RETURN OIL FLOW 31.7 GPH
 TEMPERATURE RANGE 20° - 105° F
 MAX. INLET PRESSURE 8 PSI
 CONNECTIONS 1/4" - NPT (female)

REPLACEMENT ELEMENT F100-10
 ELEMENT MEDIA 10 Micron
 ELEMENT CANISTER EPOXY INSIDE
 FUEL No. 1 & 2 HEATING OIL, B5 BioHeat®
Not for use with E-diesel or any fuel containing Ethanol (alcohol)

Tigerloop® ULTRA™ OIL DEAERATOR & SPIN-ON FILTER

Item No.	Description
S220-8	Tigerloop® ULTRA™ oil deaerator & Spin-On filter, UL Listed, includes Fiomatic fusible safety valve.
S220-12	Tigerloop® ULTRA™ Installation Bundle, oil deaerator, Spin-On filter, UL Listed, w/Fiomatic valve, plus two 36" flexible oil lines, bypass plug.
F100-10	Replacement Spin-On element only, standard thread, see page F5