



SUBMITTAL DATA SHEET

Wall Mounted Heat Pump System	
Location: _____ Engineer: _____ Submitted to: _____ Submitted by: _____ Reference: _____	Approval: _____ Date: _____ Construction: _____ Unit #: _____ Drawing #: _____

Set Model	Indoor unit model: CCOXHAWM24HP
	Outdoor unit model: CCOXHASZ24HP
Certified	



SYSTEM PERFORMANCE DATA

Power supply		
Normal Operational Voltage	(V, Ph, Hz)	208/230V, 1Ph, 60Hz
Voltage Range	(V)	187-253
Electrical		
Minimum circuit ampacity(Outdoor)	(A)	25.0
Max.fuse(Outdoor)	(A)	35.0
Connection wiring		14AWG*4
Cooling		
Capacity	(Btu/h)	24000(6850~27000)
Power Input	(W)	1845(310~2400)
Current	(A)	8.1(2.12~11)
SEER2	(Btu/W)	21.5
EER2	(Btu/W)	13.0
Heating		
Capacity	(Btu/h)	29000(11600~33000)
Power Input	(W)	2500(670~3000)
Current	(A)	10.9(4.32~13)
HSPF2-4	(Btu/W)	11.4
HSPF2-5	(Btu/W)	9.2
COP	W/W	3.40
Heat at 17F(H32)	(Btu/h)	21200
Heat at 5F(H42)	(Btu/h)	25000
COP at 5F(H42)	W/W	2.21

REFRIGERANT PIPE DATA

Design pressure	(PSIG)	550/340
Refrigerant Type		R410A
Refrigerant charge	oz	91.71
Refrigerant precharge	(ft)	25.0
Additional charge for each ft	(oz/ft)	0.32
Liquid side/ Gas side(indoor)	(inch)	3/8"/5/8"
Liquid side/ Gas side(outdoor)	(inch)	3/8"/5/8"
Max. pipe length	(ft)	164.0
Max. difference in level	(ft)	82.0
Connection method		Flared

OPERATING RANGE

Indoor(cooling)	(Deg. °F)	60~90
Indoor(heating)	(Deg. °F)	32~86
Outdoor(cooling)	(Deg. °F)	-22~122
Outdoor(heating)	(Deg. °F)	-22~75


INDOOR UNIT DATA

Indoor fan motor		
Model		ZKFP-58-8-1-6
Qty		1
Input	(W)	58.00
Output	(W)	58.0
RLA	(A)	0.5
Speed(Hi/Mi/Lo)	(r/min)	1000/850/700
Air flow & Noise level		
Indoor air flow (Hi/Med/Lo) (No duct)	(CFM)	718.82/611.18/414.12/318.82
Indoor noise level (Hi/Med/Lo)	[dB(A)]	46/39/34
Dehumidification		
	(L/H)	2.6
Indoor unit		
Dimension (WxDxH)	(inch)	46.85x11.20x14.59
Packing(WxDxH)	(inch)	50.39x14.17x17.91
Net/Gross weight	(lbs.)	43.65/54.89

OUTDOOR UNIT DATA

Compressor		
Type		Twin-ROTARY
Model		KTM240D43UKT
Brand		GMCC
Capacity	(Btu/h)	25931
Input	(W)	2045
Rated current (RLA)	(A)	17.1
Refrigerant oil/oil charge	(ml)	ESTER OIL VG74 620
Outdoor fan motor		
Model		ZKFN-120-8-2
Qty		1
Input	(W)	150.0
Output	(W)	120
RLA	(A)	0.5
Speed	(r/min)	950/800/500
Air flow & Noise level		
Outdoor air flow (Max.)	(CFM)	2235
Outdoor noise level	[dB(A)]	62.0
Outdoor unit		
Dimension (WxDxH)	(inch)	37.24x16.14x31.89
Packing (WxDxH)	(inch)	42.91x19.69x34.84
Net/ Gross weight	(lbs.)	134.48/144.40

Indoor unit dimensions

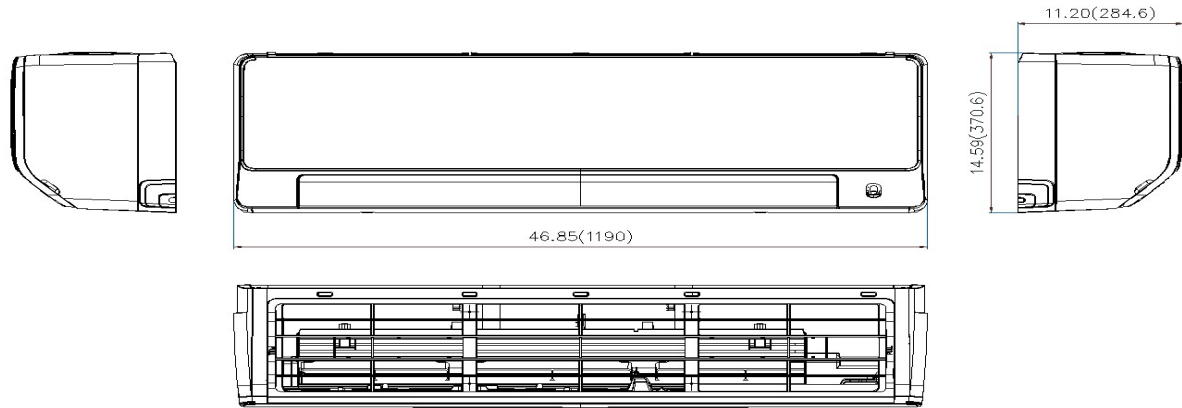

Outdoor unit dimensions

