



Flange Adapter
Fig. 6084

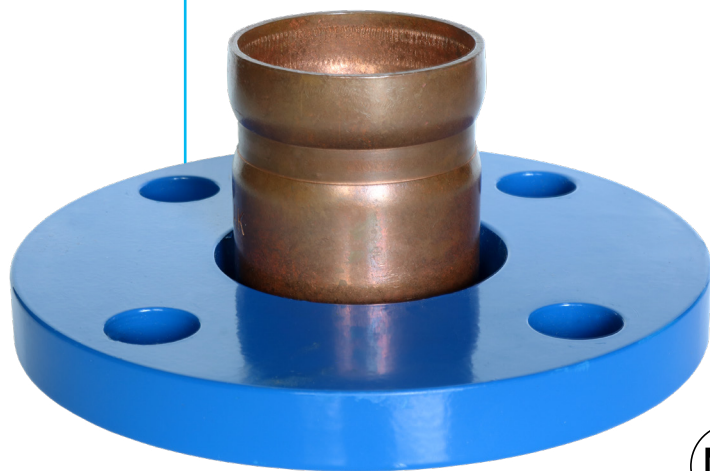

The Gruvlok Fig. 6084 Flange Adapter allows for direct connection of Class 125 or Class 150 flanged components to the CTS Copper System. The CTS Copper Flange Adapter (Sizes 2" thru 6") conforms to ANSI class 125/150 bolt patterns and is rated at 300 PSIG (20.7 bar). The flange adapter is a dielectric union, utilizing the epoxy coating as a suitable replacement for flange dielectric insulation kits.

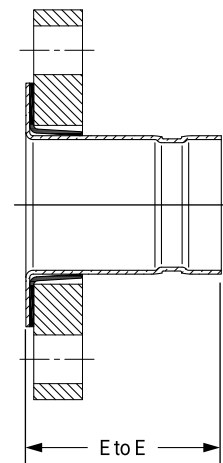

Nominal Size	Copper Tube Diameter	E to E	Approx. Wt. Ea.
In.	In./mm	In./mm	Lbs./kg
2	2.125 54.0	2.63 66.8	0.85 0.39
2½	2.625 66.7	2.00 50.8	1.34 0.61
3	3.125 79.4	2.44 62.0	1.73 0.78
4	4.125 104.8	2.88 73.2	2.43 1.10
5	5.125 130.2	3.94 100.1	3.27 1.48
6	6.125 155.6	4.31 109.5	4.78 2.17



PROJECT INFORMATION	APPROVAL STAMP
Project:	Approved
Address:	Approved as noted
Contractor:	Not approved
Engineer:	Remarks:
Submittal Date:	
Notes 1:	
Notes 2:	