



# Under-Mount Apron-Front Kitchen Sink K-6488

#### **Features**

- 36-inch minimum base cabinet width.
- Acid-resistant enamel finish.
- Under-mount.
- Single bowl.
- No faucet holes.
- Offset drain basin slopes toward drain to minimize water from pooling.
- Self-Trimming® apron overlaps cabinet face for easy installation and beautiful results.
- Shortened apron allows sink to be used in most standard cabinetry or retrofitted to existing standard cabinetry.
- 35-1/2" (902 mm) x 21-9/16" (548 mm)

#### Material

- KOHLER® enameled cast iron.
- Strainer not included.

### **Recommended Accessories**

K-9000 P-Trap

K-6639 Sink Rack

K-6377 Sponge Caddy

K-6378 Kitchen Brush Caddy

K-6379 Kitchen Squeegee

K-6382 Disinfecting Wipes Dispenser

K-6383 Soap Dispenser

K-8618 Paper Towel Holder

K-8619 Flexible Kitchen Mat

K-8624 Dish Scraper

K-8801 Sink Strainer

K-8799 Sink Strainer



## Codes/Standards

ASME A112.19.1/CSA B45.2

## **KOHLER® Enameled Cast Iron Kitchen Sink Lifetime Limited Warranty**

See website for detailed warranty information.

### **Available Color/Finishes**

Color tiles intended for reference only.


Color	Code	Description
	0	White
	FF	Sea Salt™
	96	Biscuit
	47	Almond
	FD	Cane Sugar™
	NY	Dune
	95	Ice™ Grey
	G9	Sandbar
	K4	Cashmere
	FT	Basalt
	58	Thunder™ Grey
	KA	Black 'n Tan
	FP	Caviar
	7	Black Black™









# Under-Mount Apron-Front Kitchen Sink K-6488

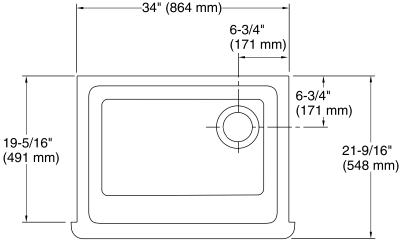

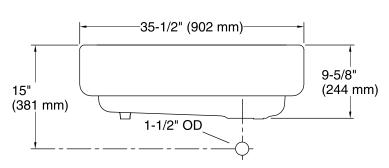



### **Technical Information**

All product dimensions are nominal.

Bowl configuration: Single

Installation: Under-mount Min. base cabinet 36" (914 mm)

width:

Bowl area (Only): Length: 30-3/4" (781 mm)

Width: 18-1/16" (459 mm) Bowl depth: 9" (229 mm)

Drain hole: 3-5/8" (92 mm)

Template: 1156910-7, required, included

1211449-7, required, included

#### **Notes**

Install this product according to the installation instructions.

NOTICE: Countertop manufacturer or cutter must use the current product template available at www.kohler.com, or by calling 1-800-4KOHLER. Kohler Co. is not responsible for cutout errors when the incorrect cutout template is used. IMPORTANT! The distance from the top edge of the cabinet to the top of the cabinet door must be at least 6-7/8" (175 mm) to install this sink.

