


A BIS Metal Pipe Clamps with Lining

BISMAT® 5000 (Ø 2 1/2 - 4")

for plastic pipes Ø 2 1/2 - 4"

3/8"

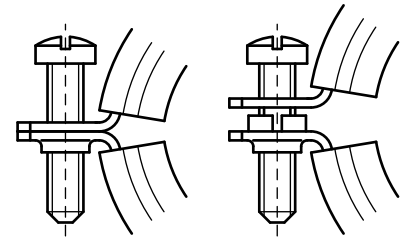

Features and benefits

- two-screw clamp
- with BISMAT® quick locking system
- with removable spacer washers, making the clamp suitable for either location or tight fixing
- material: steel
- sound insulating lining according DIN 4109
- zinc plated
- noise insulating lining, EPDM rubber, green
- lining: very suitable for applications with plastic pipes
- inner part of lining is flush to improve sliding of pipe in clamp
- age resistant lining
- complies with Federal Specification WW-H-w171E and A-A-1192A Type 4 and Manufacturers Standardization Society MSS SP-58 and SP-69 type 12
- Plenum rated - tested to ASTM E-84

Part No.	D (mm)	IP (")	CT (")	G (")	B (")	H (")	h (")	b x s (mm)	Fa,z (lbs)	Pack 1
CR 348 9 067	63	-	-	3/8"				23 x 2.0	105	50
CR 348 9 075	70 - 76	2 1/2	-	3/8"	4.9	4.1	2.2	23 x 2.0	105	50
CR 348 9 090	86 - 91	3	-	3/8"	5.4	4.6	2.4	25 x 2.5	105	25
CR 348 9 110	110 - 114	4*	-	3/8"	6.3	5.8	2.9	23 x 2.0	105	25
CR 348 9 125	124 - 132	*	-	1/2"	6.8	5.9	3.1		500	25
CR 348 9 160	155 - 160	*	-	1/2"	8.0	7.4	3.9		500	10

The max. allowed load (Fa,z) is calculated using specific statistical methods related to the breaking load, taking into account a deflection to 1,5 mm or 2% of the maximum nominal clamp diameter.

