Stay Connected

VITOCONNECT OPTO2 VICARE APP





Gas Condensing Technology

VITOCCARE OPTO2 VICARE APP



Vitoconnect OPTO2 with connections for the power supply adaptor and data connection via USB.

Stay WiFi connected, comfortable and in control with Vitoconnect

The ViCare app and WiFi-ready Vitoconnect are designed to save time, money and energy with remote Internet connectivity and automatic operation. ViCare and Vitoconnect allow smartphone and tablet users to easily monitor and program their Viessmann boiler and stay in control anytime, anywhere via the Internet.

Through simple programming with the ViCare app, users automatically save money on their heating costs and can see their savings in real time.

Automatically Save Energy

The system is designed to control and regulate your heating circuits. Swipe to the right or left to set the desired room temperature. WIth a simple touch you can change between "Normal" and "Party" mode, which extends the normal heating time program.

When leaving the house ("Away"), lower the temperature so you can save energy and money with a single click. You can select different operating times for each day through the "Heating Schedule" feature to customize your heating system to your specific preferences.

A separate button on the home screen gives plenty of energy saving tips.

System status at a glance

You can easily see if your heating operation is performing as intended. A yellow screen indicates maintenance is required. If the screen is red, your heating contractor's contact information will be displayed so you can conveniently connect with them.


WiFi Module Vitoconnect OPTO2

The Wifi Vitoconnect module is connected directly to the Vitotronic control console. At only 4 inches in size the adapter is designed to be easily wall mounted.

The module is connected to your wireless router and registered via a simple plug and play process. To connect the module to your ViCare smartphone application, simply scan the QR code included with the module. Vitoconnect is compatible with iOS and Android phones or tablets, and is available for free from the Apple® App Store and Google® Play.

ViCare compatibility with Viessmann boilers


The Vitoconnect OPTO2 module is available for purchase as an accessory feature for all Vitodens 200, Vitodens 222, and Vitocrossal 300 CU3A gas condensing boilers. The module is compatible with Viessmann wall-hung, compact units and floor standing boilers with Vitotronic 300 and 300 controls.

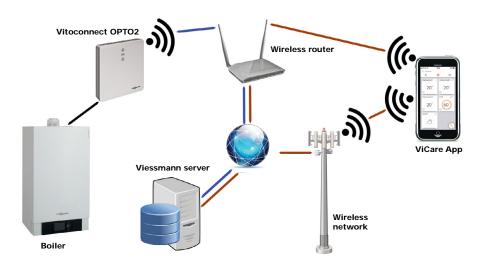

Vitoconnect OPTO2 with connections for the power supply adaptor and data connection via USB.

••••፡፡> ?	2:51 PM	* 🖦
	Your boiler is functioning properly	Outdoor 46°
Messages	Boiler	11h 50min remaining in Standby mode
Current	72 ^c	
Overview	Comfort Boile	ද්රාදි r Settings

••••○ 중	2:54 Com			* 🖦
	0011			
DESIRED TEMP	ERATURES	HE	ATING CIRC	UIT 1
Desired temperature		÷		
71°F	∥ 72	°F∥	73°F	
Reduced temperature				
54°F	∥ 55	°F ∥	56°F	-
				-
Domestic ho	t water			>
QUICK SELECT				
Party mode Staying up late too.	tonight? Your	boiler will	\bigcirc) (Ì)
Away from he	ome		\bigcirc	(i)
Overview	Comfort	Boiler	کر Setti)} ngs

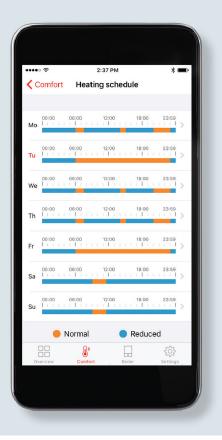

Comfort at a glance

- Easy to see the entire boiler operation
- Green indicated proper operation
- Yellow indicates upcoming maintenance required
- Red indicated assistance is required from your heating contractor

Save on heating costs

- Program your boiler for ideal temperature setting and maximum cost savings
- Automatically save on heating costs
- Control at your fingertips

Customize your heating schedule

 Set it and forget it! Program your heating schedule to suit your individual preferences, schedule, and lifestyle









Viessmann Manufacturing Company (U.S.), Inc 45 Access Road Warwick, RI 02886 1-800-288-0667 viessmann-us.com

Technical Data



Vitoconnect OPTO2

Connections	Power supply (120V/60Hz) via plug-in power supply (5') Connections with Vitotronic Control (10')

Measurements

Length	4 inches
Width	4 inches
Height	1 inch

Supported Controls:

Viessmann boilers and Vitotronic controls equipped with Optolink interface

Compatible controls for wall-mount boilers:

 Vitotronic 200 	HO1B for Vitodens 200, B2HA
	HO1B for Vitodens 200, B2HB

Compatible controls for floor standing boilers:

- HO1B for Vitodens 222, B2TA
- Vitotronic 200 HO1B for Vitodens 222, B2TB KW2 for Vitorond 100, VR1 Series KW6B for Vitocrossal 300, CU3A Series
- Vitotronic 300 KW3 for Vitorond 100, VR1 Series