




Universal Service Tech Kit

Leak Detection System Diagnostics from Tank Pressure to Domestic Water Column.

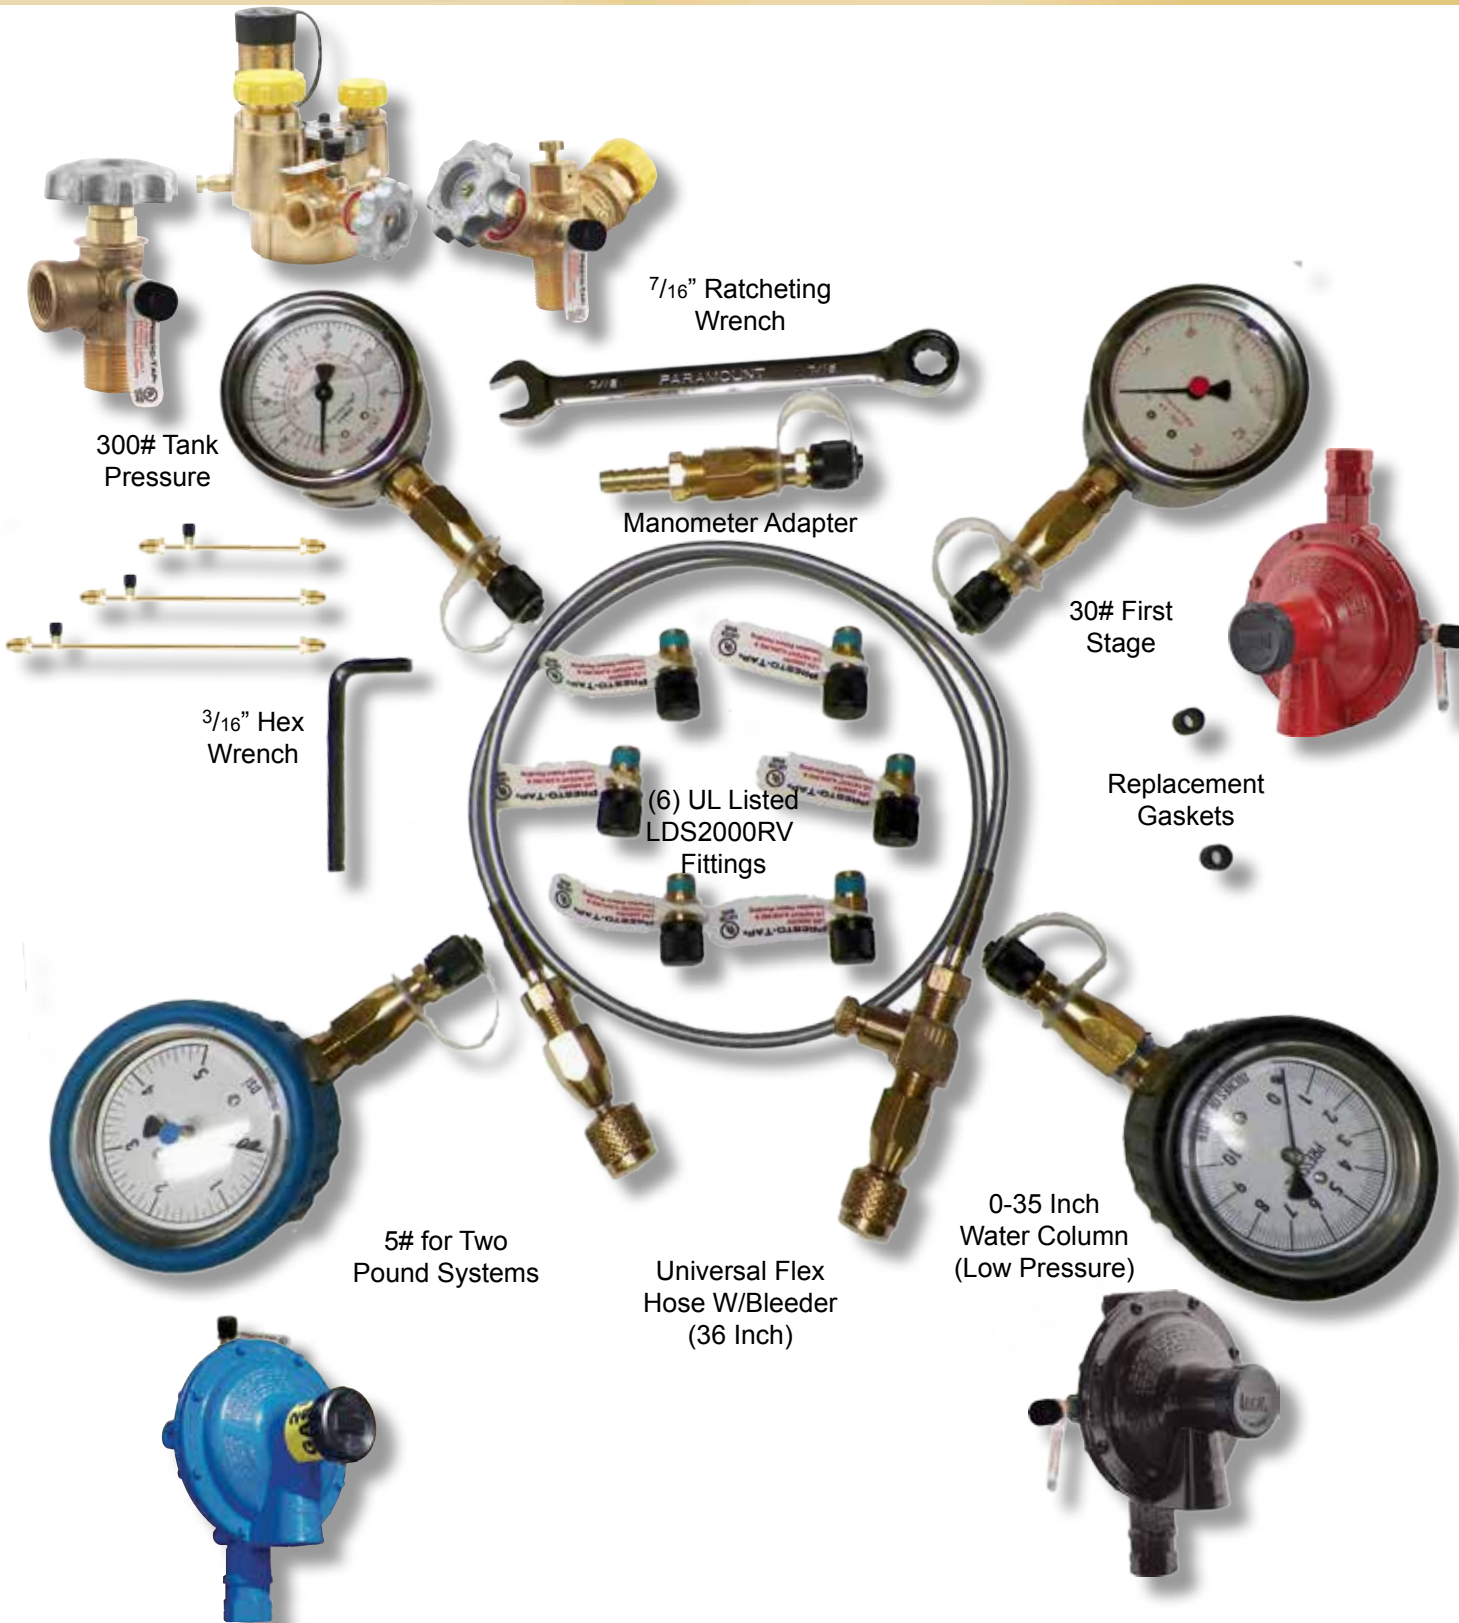

300# Tank Pressure

7/16" Ratcheting Wrench

Manometer Adapter

30# First Stage

3/16" Hex Wrench

(6) UL Listed LDS2000RV Fittings

Replacement Gaskets

5# for Two Pound Systems

Universal Flex Hose W/Bleeder (36 Inch)

0-35 Inch Water Column (Low Pressure)

- **PT6800 KGA** - 300# Ambient Temperature gauge used for Leak Testing at tank pressure with Presto Tap® pigtails, TPF fittings and RegO® "Ready to Go" series valves.
- **PT30LP-KGA** - 30# Gauge for determining first stage regulator lock up and flow along with leak testing.
- **PT5-KGA** - 5# gauge for determining lock up and flow on Two Pound Systems.
- **PTOZ-KGA** - 0-35 inch water column gauge for measuring second stage regulator lock up and flow along with low pressure leak testing.
- **MHA Kit** - Adapter used to facilitate use of master manometers (watermanometer), heli gauges.
- **3/16" Allen/Hex Key** - for plug removal in regulators.
- **Universal FlexHose** - 36" flexible hose with gauge bleeder and adapters utilized to universally connect with all gauging equipment above and Presto Tap LDS2000/RV product installed in the system.
- **LDS2000RV** - (6)UL Listed fittings with #54 orifice legal installed at any point in the system.
- **Kit Bag** - 12" Tool Denier Nylon Tool bag with 8 outer and 15 inner pockets