



SharkBite® Flexible Braided Stainless Steel Water Heater Supply Connectors

DESCRIPTION

The SharkBite® Water Heater Connectors are used in residential and commercial applications to connect the hot and cold supply lines to the water heater. The connectors are EPDM knitted with braided stainless steel. The connectors are available in 12", 15", 18" and 24" lengths. The connections on the connectors are 3/4" FIP X 3/4" SharkBite. The SharkBite connection allows the installer to connect to copper, PEX, CPVC and PE-RT pipe eliminating the need for an additional transition fitting.



U3068FLEX12LF

FEATURES AND BENEFITS

SharkBite Connection:

*Eliminates the need for additional transition fittings,
Connects to OD controlled copper, PEX, CPVC, and PE-RT pipe.*

Ease of use:

No soldering or glue.

Available in 12", 15", 18", 24" lengths:

No cutting pipe.

Design certified and agency listed:

Inspector friendly, peace of mind.


SPECIFICATION

The SharkBite Water Heater Connectors shall be used with residential and commercial water heaters. The SharkBite Connection shall be connected to copper (ASTM B88), PEX (ASTM F876), CPVC (ASTM D2846) and PE-RT (ASTM F 2769). The SharkBite Water Heater Connectors shall be used with water in accessible locations only.




SharkBite® Flexible Braided Stainless Steel Water Heater Supply Connectors

Typical Installation

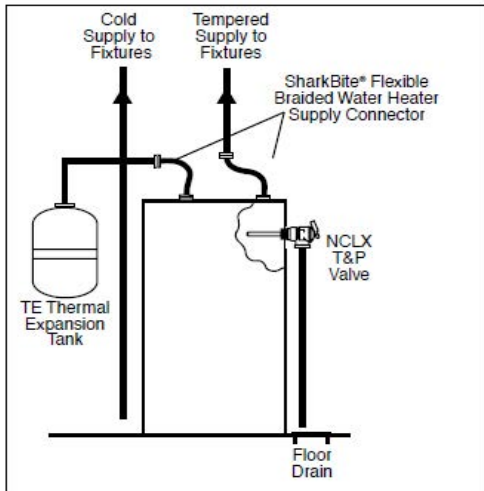

(Please consult with local plumbing codes concerning specific water heater piping requirements.)

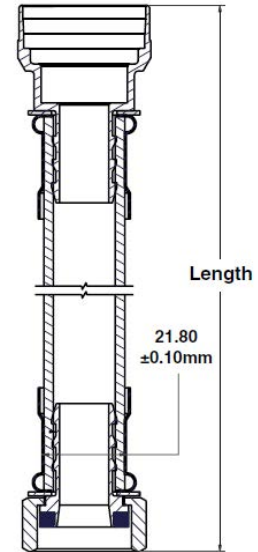

SharkBite® Water Heater Kit Dimensions

Specification Data

Performance:

Maximum pressure 200 psi
 Maximum temperature 200°F (93°C)
 Service Potable water

Materials:

3/4" FIP Nut DZR Lead Free Brass
 3/4" FIP Washer EPDM
 SharkBite Connector DZR Lead Free Brass
 Hose EPDM Knitted with Stainless steel

AVAILABLE CONNECTIONS

U3068FLEX12LF – 12" Flex hose 1/2" FIP X 3/4" SharkBite®
 U3068FLEX15LF – 15" Flex hose 1/2" FIP X 3/4" SharkBite®
 U3068FLEX18LF – 18" Flex hose 1/2" FIP X 3/4" SharkBite®
 U3068FLEX24LF – 24" Flex hose 1/2" FIP X 3/4" SharkBite®
 U3068FLEX18BVLF – 18" Flex hose 1/2" FIP X 3/4" SharkBite® BV
 U3088FLEX12LF – 12" Flex hose 3/4" FIP X 3/4" SharkBite®
 U3088FLEX15LF – 15" Flex hose 3/4" FIP X 3/4" SharkBite®
 U3088FLEX18LF – 18" Flex hose 3/4" FIP X 3/4" SharkBite®
 U3088FLEX24LF – 24" Flex hose 3/4" FIP X 3/4" SharkBite®
 U3088FLEX18BVLF – Flex hose 3/4" FIP X 3/4" SharkBite® BV
 U3086FLEX24BVLF – Flex hose 1" FIP X 3/4" SharkBite®

Part Number	Length	Description
U3068FLEX12LF	12"	12" 1/2" SS FLEX HOSE FIP x SharkBite®
U3068FLEX15LF	15"	15" 1/2" SS FLEX HOSE FIP x SharkBite®
U3068FLEX18LF	18"	18" 1/2" SS FLEX HOSE FIP x SharkBite®
U3068FLEX24LF	24"	24" 1/2" SS FLEX HOSE FIP x SharkBite®
U3068FLEX18BVLF	18"	18" 1/2" SS FLEX HOSE FIP x SharkBite® BV
U3088FLEX12LF	12"	12" 3/4" SS FLEX HOSE FIP x SharkBite®
U3088FLEX15LF	15"	15" 3/4" SS FLEX HOSE FIP x SharkBite®
U3088FLEX18LF	18"	18" 3/4" SS FLEX HOSE FIP x SharkBite®
U3088FLEX24LF	24"	24" 3/4" SS FLEX HOSE FIP x SharkBite®
U3088FLEX18BVLF	18"	18" 3/4" SS FLEX HOSE FIP x SharkBite® BV
U3086FLEX24BVLF	14"	24" 1" SS FLEX HOSE FIP x 3/4" SharkBite®

CERTIFICATIONS

The SharkBite Water Heater Connectors are tested and listed to the ASME A112.18.6, NSF/ANSI 61, and NSF/ANSI 372 standards.

