

NEW

LIBRA 6632

66 x 32 x 23 (FREESTANDING)

Libra's symmetrical lines and universal look will be a perfect fit in any style bathroom. The identical soft slope of the interior walls brings comfort and relaxation for one or two bathers.

PRODUCT SHEET

PRODUCT NO.

MODEL	TMU	TUB
Freestanding	BLIIRF00T-XX	BLIIRF00N-XX

THERMOMASSEUR (TMU)

Hydro-thermo massage • Air jet system

\$

Jets	42
1 heated backrest	Included
MiaPlus® Control* (not installed)	Included
BU-Touch Control Application	Included
Geysair®	Included
Illuzio Chromatherapy BCHRO6	\$
2 nd heated backrest (WTS-1 zone) BSHB	\$

TUB

Soaker

\$

Illuzio Chromatherapy BCHRO6	\$
WarmTouchShell® BWTS	\$
DOT control	Included with therapy
2 nd WarmTouchShell® BWTS2	\$

FEATURES

Installation type	Freestanding		
No. of bathers		Imp. gallons	52
US gallons	63		

INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

White 01 , Chrome 07 , Brushed Nickel 09 , Polished Nickel 10	Installed & Included
---	----------------------

STANDARD COLOR

	Included
White 01	

OPTIONS (UPCHARGE APPLICABLE)

COLOR

	\$
Black / White 66	

FINISH

UltraVelour Matte Finish (White only) BVEL	\$
--	----

INTEGRATED WASTE & OVERFLOW [BOVERINI-XX](#)

Matte Black 19 , Satin Brass 18	\$
---	----

ISLAND TUB DRAIN™**

Island Tub Drain™ BISLDD	\$
Cast Iron Island Tub Drain™ BISLDDCI	\$

IF REQUIRED BY CONSTRUCTION CODE OR INSTALLED WITH ITD


Brass waste & overflow kit BDRCOB	\$
Brass waste kit BDRCB	\$

Don't forget to specify the **finish of the integrated waste & overflow.**

* Control must be wall-mounted. Faucets must be freestanding or wall-mounted.

** An Island Tub Drain™ is recommended when there is **no access under the bath.**


TOTAL PRICE \$

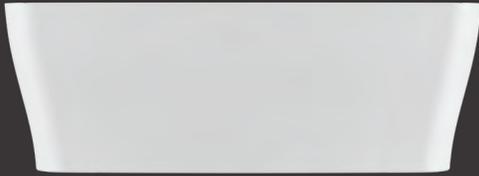

LIBRA 6632 (FREESTANDING)



INSTALLATION

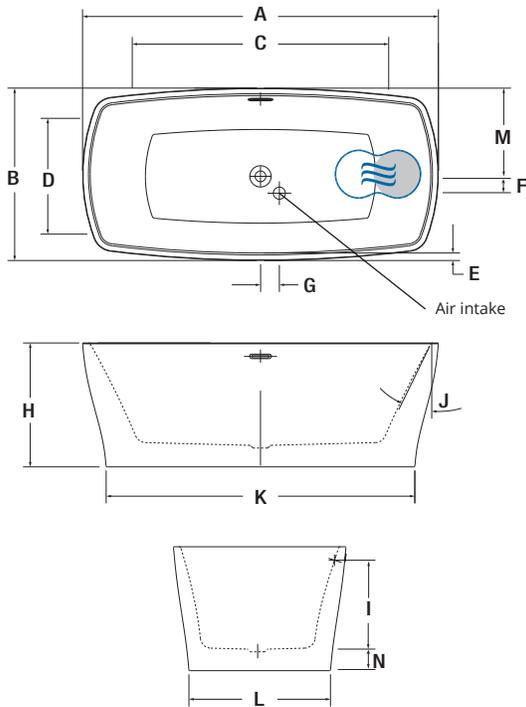

LETTER	DESCRIPTION	MEASURE
A	Total length	66"
B	Total width	32"
C	Bathing well length	47 1/2"
D	Bathing well width	21 1/2"
E	Deck width	1 3/8"
F	Center waste to air intake (side)	3 1/8"
G	Center waste to air intake (front)	3 1/2"
H	Total height	23"
I	Maximum water level	16 3/8"
J	Slope of backrests	26°
K	Base length	57 1/4"
L	Base width	26 1/4"
M	The outer edge to center of waste	16 3/8"
N	Height from drain to floor	3 1/2"

- Indicates heated backrest (TMU)
- ☞ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

Hot water supply required	Should be 70% of water capacity of TUB or greater.
Turbine	Turbine is remotely installed; access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz , dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz , dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum.
Others	<ul style="list-style-type: none"> - The GEYSAIR must always be accessible and connected to the hot water supply (provide access). - Faucet must be freestanding or wall-mounted. - The turbine must be remotely installed. - Controls cannot be installed on the deck of the bath.

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/documentation/documentation).

Cutting template	# 90000082
Approx. shipping weight	240 lbs
Turbine power	550 W
Air heater	600 W
WARRANTY	
Controls-LED-Geysair*	5 years
Bath & turbine*	20 years

* Some restrictions apply | www.bainultra.com/warranty



The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.