



GT IRRI-GATOR™

SELF-PRIMING CENTRIFUGAL PUMPS - 60 HZ



FEATURES

- Self Priming design
Once initially primed pump is capable of reprime
- Field Serviceable
Back pull out design for easy serving
- Strong and Durable cast iron casing design
- Electro-Coat paint process for corrosion resistance
- Excellent corrosion and abrasion resistance materials
Lexan® Guidevane • Noryl® Impeller
Now available with optional Silicone Brass Impeller
- 1½" NPT Suction and Discharge connections


PERFORMANCE RATINGS

Model	PSI Discharge Pressure	Suction Lift in Feet				
		5	10	15	20	25
GT07/ GT073	20	44	41	36	31	24
	30	34	31	26	22	14
	40	10	4	0	0	0
GT10/ GT103	20	53	51	49	46	41
	30	43	41	38	36	32
	40	29	22	16	8	0
GT15/ GT153	20	63	59	54	49	39
	30	60	55	51	46	37
	40	45	38	33	20	14
GT20/ GT203	20	86	77	70	59	46
	30	80	72	67	57	44
	40	65	60	57	50	43
GT30/ GT303	20	105	100	88	76	60
	30	92	90	84	75	57
	40	73	67	62	55	50

Performance ratings are in GPM. For Silicon Brass impeller, add a "B" suffix to standard part number.



PERFORMANCE CURVE

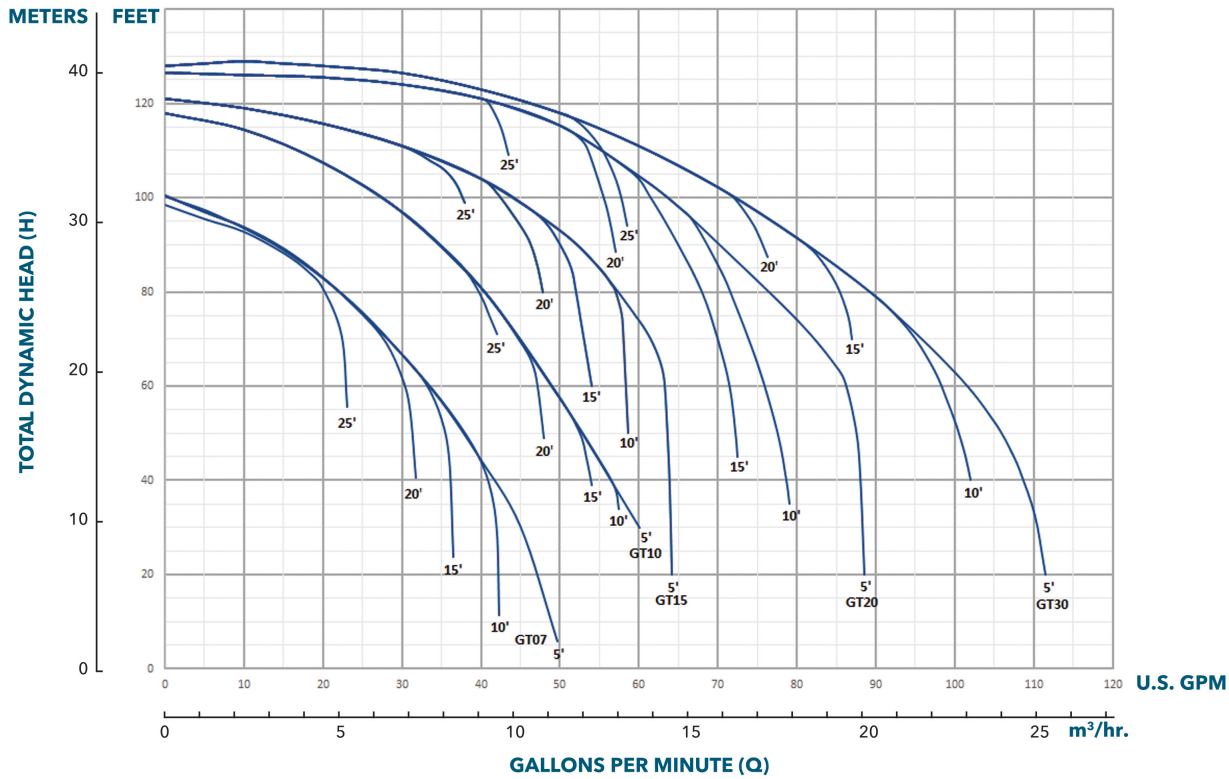

Xylem Inc.
 2881 East Bayard Street Ext., Seneca Falls, NY 13148
 Phone: (866) 325-4210 • Fax: (888) 322-5877
www.xylem.com/goulds

Xylem is a registered trademark of Xylem Inc. or one of its subsidiaries. Goulds is a registered trademark of ITT Manufacturing Enterprises LLC and is used under license. All other trademarks or registered trademarks are property of their respective owners.
 © 2024 Xylem Inc. GTSALES R4 February 2024