

### **CODE NUMBER**

3918984

### **DESCRIPTION**

1.6 gpf, Rough Brass Finish, Fixture Connection Rear Spud, Single Flush, Royal® Concealed Manual Specialty Water Closet Hydraulic Flushometer.

### **DETAILS**

• Flush Volume: 1.6 gpf (6.0 Lpf)

Finish: Rough BrassValve: Diaphragm

• Valve Body Material: Semi-red Brass

Fixture Type: Water Closet
Fixture Connection: Rear Spud
Rough-In Dimension: 24" (610mm)
Spud Coupling: 1 ½" (38mm)
Supply Pipe: 1" (25mm)

### **FEATURES**

- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Vacuum Breaker
- Non-Hold-Open Push Button, Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- ADA Compliant Non-Hold-Open Actuator
- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- Elbow Flush Connection and Coupling for 11/2" NPT Back Inlet (for connection in the pipe chase — flush connection through the wall not provided by Sloan)
- 1" I.P.S. Wheel Handle Bak-Chek® Angle Stop



### **COMPLIANCES & CERTIFICATIONS**







(BAA Compliant, cUPC Certified, UPC Certified)

### RECOMMENDED SPECIFICATION

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

# **VALVE OPERATING PRESSURE (FLOWING)**

15–80 PSI (103–552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

# **DOWNLOADS**

- Concealed Flushometer Installation Instructions for Stainless Steel Fixtures
- Control Stop Repair and Maintenance Guide
- Flush Connections Flanges Repair and Maintenance Guide
- Tail Piece Repair and Maintenance Guide
- Series 900 Flushometers Repair and Maintenance Guide
- Hydraulic Push Button Options
- Additional Downloads

### **NOTES**

All information contained within this document subject to change without notice.

Looking for other variations of the ROYAL 9611 product? View the general spec sheet with all options.

Find a compatible urinal for this flushometer. Find a compatible water closet for this flushometer.


## WARRANTY

**View Warranty Information** 

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com



# **ROUGH-IN**

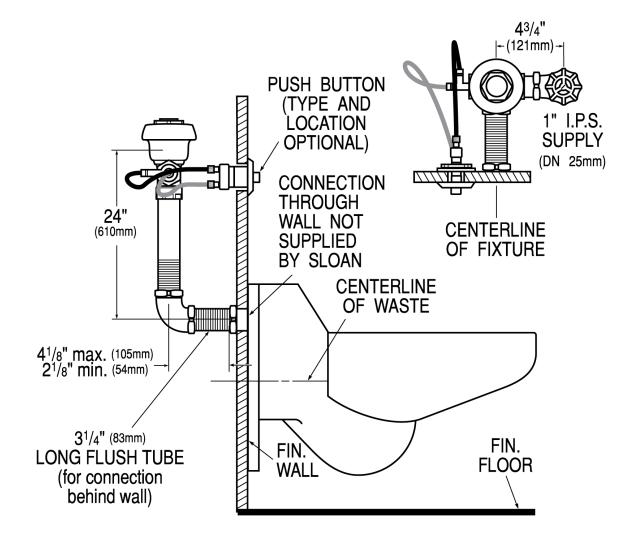

**Sloan 10500 Seymour Ave, Franklin Park, IL 60131** Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com