

# DWV PIPE SUPPORT

» 549-7 SERIES

StickEm Up™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief's 549 series StickEm Up DWV pipe support shall be used where necessary to support Schedule 40 DWV piping according to all national code requirements. Hanger shall be 100% corrosion proof and UV resistant. Hanger shall be impact resistant to 0°F and able to withstand temperatures up to 140°F.

Hanger shall have two preloaded nails, which shall be rust resistant, zincplated yellow iradite. Nails shall have a continuous ring shank to provide a more permanent installation. Hanger shall feature I-beam design for strength and rigidity.

## INSTALLATION

Secure StickEm Up pipe support to stud, joist or form board with ringshank nails. Be sure to follow national code requirements for proper pipe slope, when applicable. Install pipe in cradle of hanger either vertically or horizontally. If installer so desires, glue can be applied to cradle when installing ABS or PVC however it is not mandatory.

## MATERIALS

**Hanger:** ABS, U.V. resistant, corrosion proof, impact resistant

**Nail:** 1 7/8" rust resistant, continuous ring shank, zinc-coated yellow irradite

## SAFE WORKING LOAD


25 lbs.

## DIMENSIONS

	549-712	549-734
A: length	11.71"	13.16"
B: stem length	10"	10"
C: stem width	0.875"	0.875"
D: stem depth	0.5"	0.5"
E: nail holes	1" on center	1" on center
F: cradle diameter	1.88"	3.5"



549-734

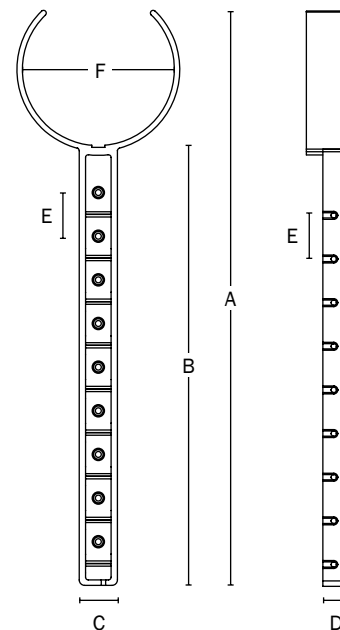

Made in USA

Create Item Number

### 549-7A

e.g. 549-712: StickEm Up for 1 1/2"-2" DWV pipe

#### CRADLE SIZE A

12 = 1 1/2"-2" DWV pipe

34 = 3"-4" DWV pipe