

DWV PIPE SUPPORT

»» 523-712W & 523-734W

ComboSaddle™

SPECIFICATION

Sioux Chief's ComboSaddle™ DWV pipe support shall be used where necessary to support Schedule 40 DWV on residential single family and multi-family projects. Pipe support cradle shall be designed to flex so that each model number supports two different pipe sizes for pipes ranging from 1½" through 4". Pipe support shall be secured to PowerBar™ Universal Slider bracket with approved hardware (provided) to center or secure pipes between joists or studs. Pipe support shall be IAPMO certified.

INSTALLATION

Follow national code requirements for proper pipe slope, when applicable. Secure galvanized PowerBar™ bracket (purchased separately) between studs or joists using all four tabs with screws. Position cradle around pipe then secure pipe support to galvanized bracket. If desired, apply multi-purpose glue to pipe support. Acceptable installations include vent riser clamp applications on plastic pipe within stud walls.

MATERIALS

ComboSaddle: ABS, U.V. resistant, corrosion proof, impact resistant

Screw: #8 x 1" phillips pan-head with drill tip

SAFE WORKING LOAD

25 lbs.


DIMENSIONS

	523-712W	523-734W
A: Saddle Clamp base height	.80"	.80"
B: Cradle diameter	1.88"	3.5"
C: Screw length	1"	1"



523-712W

523-734W

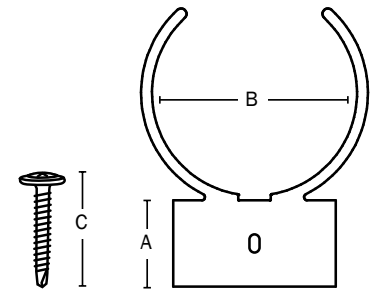

Choose Item Number

523-7A

e.g. 523-712W: ComboSaddle™ for 1½" – 2" DWV pipe

CRADLE SIZE A

12W = 1½" – 2" DWV pipe

34W = 3" – 4" DWV pipe

