




Tub and Shower

TRIM ONLY MultiChoice™ Universal Thermostatic shower for dual showers w/standard 24" Stainless Steel Bar with ADA Slide handshower 2.5 GPM (9.5 L/min) and shower diverter valve - requires separate order of R10700-UNWS Rough-in

Model No: T17TH325

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
-  Indicates compliance to ICC/ANSI A117.1
- Thermostatic Valve ASSE 1016
- Handshower backflow protection provided by two integral certified check valves in series, which operate independently, ASME A112.18.3
- (Contact Delta Representative for State and/or Local Approvals)



NOTES:

T17TH1 - MultiChoice™ Universal Thermostatic - Shower Valve

T17TH2 - MultiChoice™ Universal Thermostatic - Shower Valve & Diverter Spout

T17TH9 - MultiChoice™ Universal Thermostatic - Shower Valve, Diverter Spout & Diverter Valve

SPECIFICATION:

- TempAssure® 17T Thermostatic cartridge
- Thermostatic wax element maintains the outlet temperature to +/- 3.6 F
- Polished chrome plated finish
- Non-removeable red/blue temperature markings
- Cartridge rated minimum 1.7 gpm @45 psi (6.4 L/min @ 310kPa)
- Separate ROUGH-IN – R10700-UNWS required
- ADA Compliant diverter handle
- ADA Compliant lever volume control, field adjustable to limit rotation into hot water zone; temperature adjustment dial
- In-wall diverter valve (R10700-UNWS ROUGH-IN)
- Standard 24" Stainless Steel Bar with ADA Slide Handshower with Push Button Pause
- Handshower Flow Rate MAX: 2.5 GPM @ 80 PSI (9.5 L/min @ 552 kPa)
- Handshower Flow Rate MIN: 2.4 GPM @ 45 PSI (9.1 L/min @ 310 kPa)
- Backflow protection provided by two integral check valves in handshower
- Handle#: 5 - Metal Lever Volume Control Handle w/Temperature Adjustment
- #2 Shower - 3-Function Touch-Clean Showerhead, Arm & Flange
- #2 Shower Flow Rate MAX: 1.75GPM @ 80 PSI (6.6 L/min @ 552 kPa)
- #2 Shower Flow Rate MIN: 1.5 GPM @ 45 PSI (5.7 L/min @ 310 kPa)

OPERATION:


- Not Available

(Dimensional drawing on following page)

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 24, 2018.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030

Model No: T17TH325

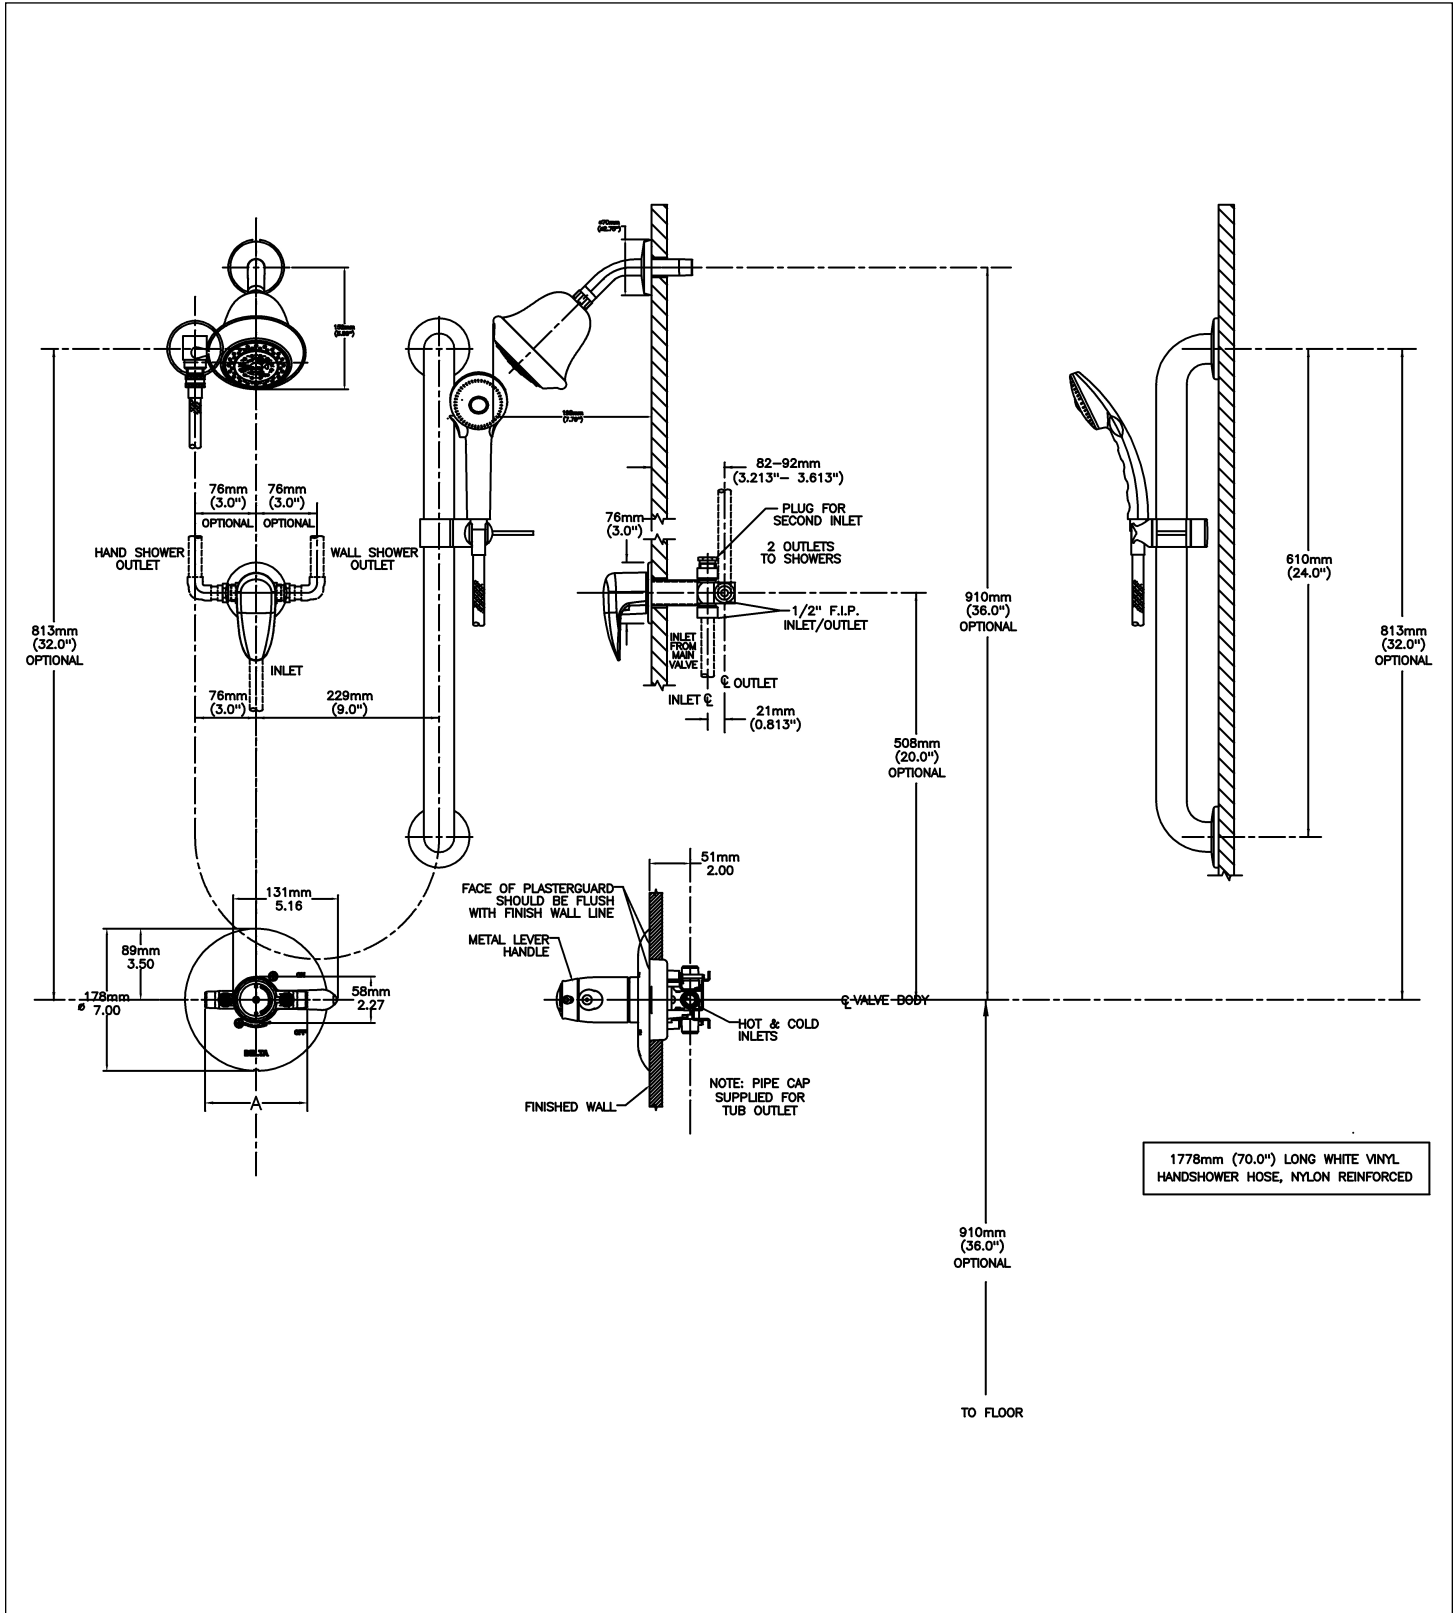

Delta reserves the right (1) to make changes to specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference. Measurement may vary plus or minus 6mm(0.25"). Mounting locations are suggested only. Check with local codes for requirements in your area. This spec was produced July 24, 2018.

Delta Faucet Company - 55 East 111th St. - Indianapolis, Indiana, USA 46280 - (317) 848-1812
 Delta Faucet Canada - 395 Matheson Blvd E - Mississauga, Ontario, Canada L4Z 2H2 - (905) 712-3030