

Job Name:	
Job Location:	
Contractor:	
Engineer:	
Approval:	

Con-Stab® Male Adapters


Design Features:

- Continental's Patented "ID Seal"
- For Underground PE Pipe (ASTM D 2513) Only
- Yellow Medium Density Polyethylene PE2406
- Zinc Dichromate Plated Steel
- Made in the USA

Operating Specifications:

Temperature: -20° to 140° F

Pressure: 125 psi

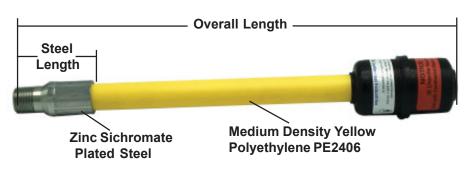

Continental's "ID Seal"






You must use a Continental Chamfer Tool on a Continental Fitting





Continental Industries is an ISO 9001 Certified Company.
NFPA 58, LP-Gas Code
NFPA 54, National Fuel Gas Code
IAPMO - Uniform Plumbing Code
ICC - International Plumbing Code
Approved by the Commonwealth of Massachusetts
D.O.T., Title 49 of the Code of Federal Regulations, Part 192.283 (b)
ASME 831.8-1995 "Gas Transmission and Distribution Piping Systems"
ASTM D 2513 "Standard Specifications for Thermoplastic Gas Pressure Pipe, Tubing and Fittings



	•				- I.E.OVERGIOOT	
W-R#	Size	Wall Thickness	Steel Length	Overall Length	Weight	Required Chamfer Tool
2885000	1-1/2" CTS	.090 Wall	5"	19-1/8"	.71 lbs.	2888020
2885002	3/4" IPS	SDR-11	5"	19-1/4"	1.5 lbs.	2888014
2885004	1" IPS	SDR-11	5"	19-1/4"	2.0 lbs.	2888016
2885020	1" CTS	.099/.101 Wall	5"	19-1/4"		2888022
2885006	1-1/4" IPS	SDR-10	5-1/2"	21-13/16"	3.0 lbs.	2888006
2885007	1-1/4" IPS	SDR-11	5-1/2"	21-13/16"	3.1 lbs.	2888007
2885008	1-1/2" IPS	SDR-11	5-3/4"	22-5/8"	3.8 lbs.	2888008
2885010	2" IPS	SDR-11	5-3/4"	22-5/8"	4.5 lbs.	2888010